

FORM PTO-1390 REV. 5-93 <div style="text-align: center; font-weight: bold;"> TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371 </div>		US DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE ATTORNEYS DOCKET NUMBER P01,0293	
INTERNATIONAL APPLICATION NO. PCT/EP00/03850		U.S. APPLICATION NO. (if known, see 37 CFR 1.5) <div style="font-size: 1.5em; font-weight: bold; text-align: center;">10/009539</div>	
INTERNATIONAL FILING DATE 28 April 2000		PRIORITY DATE CLAIMED 29 April 1999	
TITLE OF INVENTION "METHOD, SYSTEM AND COMPUTER PROGRAM FOR COMPRESSING AND TRANSMITTING IMAGE RASTER DATA"			
APPLICANT(S) FOR DO/EO/US Helmut WEINER			
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:			
<ol style="list-style-type: none"> 1. <input checked="" type="checkbox"/> This is a FIRST submission of items concerning a filing under 35 U.S.C. 371. 2. <input type="checkbox"/> This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371. 3. <input checked="" type="checkbox"/> This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay. 4. <input checked="" type="checkbox"/> A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date. 5. <input checked="" type="checkbox"/> A copy of International Application as filed (35 U.S.C. 371(c)(2)) <ol style="list-style-type: none"> a. <input checked="" type="checkbox"/> is transmitted herewith (required only if not transmitted by the International Bureau). b. <input type="checkbox"/> has been transmitted by the International Bureau. c. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US) 6. <input checked="" type="checkbox"/> A translation of the International Application into English (35 U.S.C. 371(c)(2)). 7. <input checked="" type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. §371(c)(3)) <ol style="list-style-type: none"> a. <input type="checkbox"/> are transmitted herewith (required only if not transmitted by the International Bureau). b. <input type="checkbox"/> have been transmitted by the International Bureau. c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired. d. <input checked="" type="checkbox"/> have not been made and will not be made. 8. <input type="checkbox"/> A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)). 9. <input checked="" type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)). 10. <input checked="" type="checkbox"/> A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)). <p>Items 11. to 16. below concern other document(s) or information included:</p> <ol style="list-style-type: none"> 11. <input checked="" type="checkbox"/> An Information Disclosure Statement under 37 C.F.R. 1.97 and 1.98; (PTO 1449, Prior Art, Search Report). 12. <input checked="" type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 C.F.R. 3.28 and 3.31 is included. <div style="text-align: center; font-weight: bold;">(SEE ATTACHED ENVELOPE)</div> 13. <input checked="" type="checkbox"/> A FIRST preliminary amendment. <input type="checkbox"/> A SECOND or SUBSEQUENT preliminary amendment. 14. <input checked="" type="checkbox"/> A substitute specification & marked up version of application. 15. <input type="checkbox"/> A change of power of attorney and/or address letter. 16. <input checked="" type="checkbox"/> Other items or information: <ol style="list-style-type: none"> a. <input checked="" type="checkbox"/> Submittal of Drawings b. <input checked="" type="checkbox"/> EXPRESS MAIL #EL 843744039US, dated October 29, 2001. 			

10/009539

PCT/EP00/03850

P01,0293

17. ☒ The following fees are submitted:**BASIC NATIONAL FEE (37 C.F.R. 1.492(a)(1)-(5):**

Search Report has been prepared by the EPO or JPO \$890.00

International preliminary examination fee paid to USPTO (37 C.F.R. 1.482) \$710.00

No international preliminary examination fee paid to USPTO (37 C.F.R. 1.482) but international search fee paid to USPTO (37 C.F.R. 1.445(a)(2)) \$740.00

Neither international preliminary examination fee (37 C.F.R. 1.482) nor international search fee (37 C.F.R. 1.445(a)(2)) paid to USPTO \$1040.00

International preliminary examination fee paid to USPTO (37 C.F.R. 1.482) and all claims satisfied provisions of PCT Article 33(2)-(4) \$ 100.00

ENTER APPROPRIATE BASIC FEE AMOUNT =

CALCULATIONS

PTO USE ONLY

\$ 890.00

Surcharge of \$130.00 for furnishing the oath or declaration later than ☐ 20 ☐ 30 months from the earliest claimed priority date (37 C.F.R. 1.492(e)).

\$

Claims

Number Filed

Number
Extra

Rate

Total Claims

54 - 20 =

34

X \$ 18.00

\$ 612.00

Independent Claims

9 - 3 =

6

X \$ 84.00

\$ 504.00

Multiple Dependent Claims

\$280.00 +

\$

TOTAL OF ABOVE CALCULATIONS =

\$ 2006.00

Reduction by 1/2 for filing by small entity, if applicable. Verified Small Entity statement must also be filed. (Note 37 C.F.R. 1.9, 1.27, 1.28)

\$

SUBTOTAL =

\$ 2006.00

Processing fee of \$130.00 for furnishing the English translation later than ☐ 20 ☐ 30 months from the earliest claimed priority date (37 CFR 1.492(f)).

+

\$

TOTAL NATIONAL FEE =

\$ 2006.00

Fee for recording the enclosed assignment (37 C.F.R. 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 C.F.R. 3.28, 3.31). \$40.00 per property

+

\$

TOTAL FEES ENCLOSED =

\$ 2006.00

Amount to be
refunded

\$

charged

\$

a. ☒ A check in the amount of \$ 2006.00 to cover the above fees is enclosed.b. ☐ Please charge my Deposit Account No. _____ in the amount of \$ _____ to cover the above fees. A duplicate copy of this sheet is enclosed.c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 501519. A duplicate copy of this sheet is enclosed.

NOTE: Where an appropriate time limit under 37 C.F.R. 1.494 or 1.495 has not been met, a petition to revive (37 C.F.R. 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

Schiff Hardin & Waite
Patent Department
6600 Sears Tower
Chicago, Illinois 60606

SIGNATURE

Melvin A. Robinson

NAME

31,870

Registration Number

CUSTOMER NO. 26574

- 1 -

IN THE UNITED STATES ELECTED OFFICE
OF THE UNITED STATES PATENT AND TRADEMARK OFFICE
UNDER THE PATENT COOPERATION TREATY-CHAPTER II

"PRELIMINARY AMENDMENT"

5 APPLICANT: Helmut WEINER

SERIAL NO.: EXAMINER:

FILING DATE: ART UNIT:

INTERNATIONAL APPLICATION NO.: PCT/EP00/03850

INTERNATIONAL FILING DATE: 28 April 2000

10 INVENTION: METHOD, SYSTEM AND COMPUTER PROGRAM FOR
COMPRESSING AND TRANSMITTING IMAGE RASTER

Hon. Assistant Commissioner for Patents
Box PCT
Washington D.C. 20231

15 SIR:

Amend the above-identified international application before entry into the national stage before the U.S. Patent & Trademark Office under 35 U.S.C. §371 as follows:

IN THE SPECIFICATION

20 Enclosed is a Substitute Specification that has been amended to place the International application into form for U.S. prosecution. Also enclosed is a marked up version of the specification showing the changes made to the original application which resulted in the substitute specification.

IN THE CLAIMS

Cancel claims 1-38 without prejudice. Add new claims 39-92 as follows:

39. A method for compressing and transmitting image raster data of pages,
comprising the steps of:
5 generating a data stream of image raster data from language elements of a graphics
language, said data stream containing gray image areas in a form of dither cells
whose gray scale values are determined by model dither cells;
dividing said image raster data of each one of said pages into tiles of a two-dimensional
grid network, each of said tiles include a plurality of said image raster data;
10 identifying appertaining ones of model dither cells and said gray scale values for each of
said tiles that contains only dither cells, and marking said tiles that contains only
dither cells to produce marked tiles; and
transmitting characteristic data of said marked tiles for further processing of said image
raster data, said characteristic data containing information about a position of a
15 respective one of said tiles and a respective one of said gray scale values.

40. A method as claimed in claim 39, wherein said dither cells picture elements that
are arranged one of rectangularly and quadratically; and
wherein said model dither cell with a higher gray scale value at least contains inked
picture elements at same positions as said model dither cell with a next-lower gray scale
20 value.

41. A method as claimed in claim 40, further comprising the step of:
checking each of said tiles to see whether said tiles contain dither cells of a type of said
model dither cell with a lowest gray scale value.

42. A method as claimed in claim 41, wherein said step of checking includes
25 checking tiles tile row by tile row, including investigating a first row first per tile; and,

given a lack of coincidence, the appertaining tile is investigated no further.

43. A method as claimed in claim 41, further comprising the step of:
determining said model dither cell with a highest gray scale value that is contained in all
dither cells of a tile for the tile that contains dither cells of a type of said model
5 dither cell with said lowest gray scale value; and
assigning a gray scale value of said model dither cell to said tile.

44. A method as claimed in claim 39, wherein said tiles have a uniform row length.

45. A method as claimed in claim 44, wherein said uniform row length corresponds
to a bit length of a register of a hardware module with which the present method is
10 implemented.

46. A method as claimed in claim 44, wherein said uniform row length amounts to
one of 8, 16, 32, 64 and 128 bits or an additive combination thereof.

47. A method as claimed in claim 46, further comprising the step of:
comparing using a comparison row that contains only said model dither cells and whose
15 length at least corresponds to said uniform row length of a tile so as to determine
whether a tile contains dither cells at least with said lowest gray scale value
corresponding to said model dither cell; and
implementing said comparing step tile row by tile row.

48. A method as claimed in claim 47, wherein the length of said comparison row
20 amounts to a smallest common multiple of row length of a tile and row length of said dither
cell.

49. A method as claimed in claim 48, wherein said dither cell has one of an 8x8 and 10x10 picture element matrix.

50. A method as claimed in claim 47, further comprising the step of:
using said comparison row with appertaining model dither cells for each gray scale value.

51. A method as claimed in claim 39, further comprising the step of:
combining neighboring tiles having a prescribed gray scale value corresponding to said
model dither cell to form a polygon; and
transmitting said characteristic data of said polygon for further processing of said image
raster data.

52. A method as claimed in claim 51, wherein said transmitting step transmits said
characteristic data in compressed form.

53. A method as claimed in claim 51, wherein said polygon is one of a square and a
rectangle.

54. A method as claimed in claim 53, wherein said combining step combines said
tiles to form a rectangle have a common minimal gray scale value; and
wherein said transmitting step transmits said characteristic data of said rectangle.

55. A method as claimed in claim 54, wherein said rectangle contains a sub-
rectangle whose tiles have a minimum gray scale value that is higher than a gray scale value
of the tiles of said rectangle.

56. A method as claimed in claim 54, further comprising the steps of:
producing a list of rectangles; and

transmitting said characteristic data of said list.

57. A method as claimed in claim 56, wherein said transmitting step transmits said characteristic data in compressed form.

58. A method as claimed in claim 56, further comprising the steps of:
5 organizing said list such that rectangles with a descending plurality of tiles assume a descending rank in the list; and
transmitting only those rectangles from said list whose plurality of tiles exceeds a predetermined value for further processing.

59. A method as claimed in claim 56, further comprising the step of:
10 limiting a number of rectangles of said list to a predetermined value.

60. A method as claimed in claim 54, further comprising the steps of:
expanding boundaries of said rectangles by incorporating into an expanded rectangle dither cells of one of a row and of a sequence that adjoin a corresponding rectangle and that have a same minimum gray scale value as said dither cells of said
15 corresponding rectangle.

61. A method as claimed in claims 54, further comprising the steps of:
determining a position of an upper left corner, a height, a width and a gray scale value for each of said rectangles with reference to said pages as said characteristic data; and
transmitting said characteristic data.

20 62. A method as claimed in claim 61, wherein said transmitting step includes transmitting said characteristic data in compressed form.

63. A method as claimed in claim 39, further comprising the steps of:
removing said raster image data of said marked tiles from said data stream by subtraction;
and
compressing a remaining data stream according to a standardized compression method and
transmitting said remaining data stream.

64. A method as claimed in claim 62, wherein said standardized compression
method is a FAX G4 compression method.

65. A method as claimed in claim 54, further comprising the steps of:
marking said rectangles that contain only dither cells to produce marked rectangles;
removing said raster image data of said marked rectangles from said data stream by
subtraction; and
compressing a remaining data stream according to a standardized compression method and
transmitting said remaining data stream.

66. A method as claimed in claim 65, wherein said standardized compression
method is a FAX G4 compression method.

67. A method as claimed in claim 39, further comprising the step of:
transmitting data of said marked tiles according to an SPDS data format.

68. A method as claimed in claim 54, further comprising the step of:
transmitting data of said rectangles according to an SPDS data format.

69. A method as claimed in claim 63, further comprising the step of:
recompiling a transmitted image raster data using an OR function.

70. A method as claimed in claim 39, further comprising the step of:
generating said data stream of said image raster data from language elements of the
graphics language using an RIP module.

71. A method as claimed in claim 70, wherein said RIP module is a POSTSCRIPT
converter module.

72. A method as claimed in claim 39, further comprising the step of:
transmitting said raster data as print raster data to a printer.

73. A method as claimed in claim 71, wherein said printer is a high-performance
printer.

74. A method as claimed in claim 73, wherein said high-performance printer has a
printing output of at least 400 DIN A4 pages per minute at 600 dpi.

75. A system for compressing and transmitting image raster data, comprising:
an RIP module that generates a data stream of said image raster data page-by-page from
language elements of a graphics language, said data stream containing gray image
areas in a form of dither cells whose gray scale values are determined by model
dither cells;
a two-dimensional grid network by which said image raster data of each page are divided
into tiles, each tile including a plurality of image raster data,
an appertaining model dither cell and a gray scale value thereof are identified for each tile
that contains only dither cells and this tile is marked; and
apparatus for transmitting characteristic data of the marked tiles for further processing of
the image raster data, said characteristic data including information about a position
of the respective tile and a respective gray scale value.

76. A system as claimed in claim 75, wherein said dither cells contain rectangularly or quadratically arranged picture elements; and

wherein the model dither cell with a higher gray scale value at least contains inked picture elements at a same positions as the model dither cell with a next-lower gray scale value.

77. A system as claimed in claims 75, further comprising:
a polygon formed by combining neighboring tiles with predetermined gray scale value corresponding to a model dither cell; and
wherein said apparatus for transmitting transmits characteristic data of said polygon for further processing of the image raster data.

78. A system as claimed in claim 77, wherein said apparatus for transmitting includes an apparatus for transmitting said characteristic data in compressed format.

79. A system as claimed in claim 77, wherein said polygon is one of a square and a rectangle.

80. A method for compressing and transmitting image raster data of pages, comprising the steps of:
generating a data stream of image raster data page-by-page from language elements of a graphics language, said data stream containing gray picture elements in a form of dither cells whose gray scale values are defined by model dither cells;
determining at least one area that contains only dither cells;
identifying an appertaining model dither cell and a gray scale value of said at least one area and marking said at least one area; and
transmitting characteristic data of the marked area for further processing of the image raster data, said characteristic data contain information about a position of the respective

tile and the respective gray scale value.

81. A method as claimed in claim 80, wherein said dither cells contain one of
rectangularly and quadratically arranged picture elements; and
wherein said model dither cell with a higher gray scale value at least contains inked
5 picture elements at a same positions as said model dither cell with a next-lower gray scale
value.

82. A method as claimed in claim 81, wherein said dither cells of a rectangular
region have a common minimum gray scale value.

83. A method as claimed in claim 82, further comprising the steps of:
producing a list of rectangles; and
10 transmitting said characteristic data of said list.

84. A method as claimed in claim 83, wherein said transmitting step transmits said
characteristic data in compressed form.

85. A computer program product, comprising:
15 a computer-readable medium on which is stored a computer program having commands in
encoded form, said computer program causing a computer to implement the following
steps:
generating a data stream of image raster data from language elements of a graphics
language, said data stream containing gray image areas in a form of dither cells
20 whose gray scale values are determined by model dither cells;
dividing said image raster data of each one of said pages into tiles of a two-dimensional
grid network, each of said tiles include a plurality of said image raster data;
identifying appertaining ones of model dither cells and said gray scale values for each of

said tiles that contains only dither cells, and marking said tiles that contains only dither cells to produce marked tiles; and
transmitting characteristic data of said marked tiles for further processing of said image raster data, said characteristic data containing information about a position of a
5 respective one of said tiles and a respective one of said gray scale values.

86. A computer program product, comprising:
a computer-readable medium on which is stored a computer program having commands in encoded form, said computer program causing a computer to implement the following steps:
10 generating a data stream of image raster data page-by-page from language elements of a graphics language, said data stream containing gray picture elements in a form of dither cells whose gray scale values are defined by model dither cells;
determining at least one area that contains only dither cells;
identifying an appertaining model dither cell and a gray scale value of said at least one area
15 and marking said at least one area; and
transmitting characteristic data of the marked area for further processing of the image raster data, said characteristic data contain information about a position of the respective tile and the respective gray scale value.

87. A computer program element, comprising:
20 commands in encoded form that cause a computer to implement the following steps:
generating a data stream of image raster data from language elements of a graphics language, said data stream containing gray image areas in a form of dither cells whose gray scale values are determined by model dither cells;
dividing said image raster data of each one of said pages into tiles of a two-dimensional
25 grid network, each of said tiles include a plurality of said image raster data;
identifying appertaining ones of model dither cells and said gray scale values for each of

said tiles that contains only dither cells, and marking said tiles that contains only dither cells to produce marked tiles; and
transmitting characteristic data of said marked tiles for further processing of said image raster data, said characteristic data containing information about a position of a
5 respective one of said tiles and a respective one of said gray scale values.

88. A computer program element as claimed in claim 87, wherein said computer program element is present on a computer-readable medium.

89. A computer program element, comprising:
commands in encoded form that cause a computer to implement the following steps:
10 generating a data stream of image raster data page-by-page from language elements of a graphics language, said data stream containing gray picture elements in a form of dither cells whose gray scale values are defined by model dither cells;
determining at least one area that contains only dither cells;
identifying an appertaining model dither cell and a gray scale value of said at least one area
15 and marking said at least one area; and
transmitting characteristic data of the marked area for further processing of the image raster data, said characteristic data contain information about a position of the respective tile and the respective gray scale value.

90. A computer program element as claimed in claim 89, wherein said computer program element is present on a computer-readable medium.

91. A computer-readable medium that contains a computer program, comprising:
the computer program on the computer-readable medium which causes a computer to implement the following steps:
generating a data stream of image raster data from language elements of a graphics

language, said data stream containing gray image areas in a form of dither cells
whose gray scale values are determined by model dither cells;
dividing said image raster data of each one of said pages into tiles of a two-dimensional
grid network, each of said tiles include a plurality of said image raster data;
5 identifying appertaining ones of model dither cells and said gray scale values for each of
said tiles that contains only dither cells, and marking said tiles that contains only
dither cells to produce marked tiles; and
transmitting characteristic data of said marked tiles for further processing of said image
raster data, said characteristic data containing information about a position of a
10 respective one of said tiles and a respective one of said gray scale values.

92. A computer-readable medium that contains a computer program, comprising:
the computer program on the computer-readable medium which causes a computer to
implement the following steps:
generating a data stream of image raster data page-by-page from language elements of a
15 graphics language, said data stream containing gray picture elements in a form of
dither cells whose gray scale values are defined by model dither cells;
determining at least one area that contains only dither cells;
identifying an appertaining model dither cell and a gray scale value of said at least one area
and marking said at least one area; and
20 transmitting characteristic data of the marked area for further processing of the image raster
data, said characteristic data contain information about a position of the respective
tile and the respective gray scale value.

IN THE ABSTRACT

Please add the following:

5

A method and system for printing of gray scale images utilizes raster image data. A page is divided into tiles in a two dimensional grid. Tiles are checked for the presence of dither cells for generating gray scale values. Tiles without dither cells are compressed for transmission while tiles having dither cells are not compressed.

REMARKS

The foregoing amendments to the specification and claims under Article 41 of the Patent Cooperation Treaty place the application into a form for prosecution before the U.S. Patent and Trademark Office under 35 U.S.C. §371. Accordingly, entry of these
5 amendments before examination on the merits is hereby requested.

Respectfully submitted,



Melvin A. Robinson (reg. no. 31,870)

Patent Department

Schiff Hardin & Waite

6600 Sears Tower

Chicago, Illinois 60606

Telephone: 312-258-5785

CUSTOMER NO. 26574

ATTORNEY FOR APPLICANT

8/p1b

SPECIFICATION

TITLE

**"METHOD, SYSTEM AND COMPUTER PROGRAM FOR COMPRESSING
AND TRANSMITTING IMAGE RASTER DATA"**

5 BACKGROUND OF THE INVENTION

Field of the Invention

The present invention relates to a method for compressing and transmitting image raster data, whereby a data stream of image raster data is generated page-by-page from language elements of a graphics language, the data stream containing gray image areas in the form of dither cells whose gray scale values are determined by model dither cells. The invention also relates to a system for compressing and transmitting image raster data upon employment of the aforementioned method. The invention also relates to a computer system with whose assistance a computer can implement the method.

Description of the Related Art

15 It is not only black/white structures but also gray image areas that have a prescribed gray scale value that are being increasingly being employed when printing text and drawings. When, for example, an RIP module generates a data stream of image raster data page-by-page from language elements of a graphics language, for example the known printer language POSTSCRIPT, a noticeably larger dataset must be processed due to the gray image
20 areas that are produced by dithering. The RIP module (RIP = raster image processing) is generally arranged outside the printer; this means that its image raster data must be

compressed in order to be able to transmit the data in time-conforming fashion with a given data transmission rate. The following example makes this clear: A DIN A4 page contains approximately 4.3 megabytes of image raster data given a pixel density of 600 dpi (dots per inch). A high-performance printer has the capability of printing more than 400 DIN A4 pages per minute at 600 dpi. Accordingly, a data rate of more than 28 megabytes/s would have to be governed without compression.

Up to now, the image raster data were compressed with the assistance of a standardized compression method, for example the FAX G4 compression method, and were intermediately stored and/or directly transmitted to the printer in this compressed form. For example, International Patent Application No. PCT/DE95/01293, which claims the priority of German Patent Application No. 44 34 068.0, references compression methods in conjunction with printers. The PCT Application PCT/DE95/01293 is incorporated hereby by reference. When a printed page contains either no or only a few gray raster image areas, the compression time is relatively short and the efficiency of the compression is relatively high. When, however, a page contains a great proportion of gray raster image regions, then the compression time lengthens exponentially and the compression efficiency becomes low.

Picture elements in the form of gray rasters are often generated upon employment of the dithering method. In this dithering method, gray scales are generated by employing dot patterns (rasters). The dithering method exploits a unique property of the human eye: individual picture elements are no longer perceived beyond a specific viewer distance and a specific dot density, but blur to form a gray scale value. A dither cell, accordingly, contains a plurality of picture elements; of which only one picture element, several picture elements or

all picture elements of a dither cell are inked dependent on the desired gray scale value. In order to achieve a good melding of the picture elements, the inked picture elements are scattered according to a predetermined algorithm. The gray scale values themselves are fixed by given model dither cells. When a dither cell contains 8x8 picture elements in the form of a matrix and a symmetrical arrangement of the inked picture elements is prescribed, then 32 or 64 gray scale values can be realized. Since dither cells and the distribution of the inked picture elements are relatively complex, standard compression methods for the reduction of the data volume often fail.

Section 6 in Das Druckerbuch of Océ Printing Systems GmbH, 3rd Edition, 1998, ISBN 3-00-001019-X describes raster technique, whereby a dither technique is also addressed. Among others, the dot pattern method is described as a dither technique. The above document is incorporated herein by reference.

The dithering method is also described in Das große Data Becker Computer Lexikon, 1997 Edition, ISBN 3-8158-1575-4, and in Computer Lexikon, Verlag C. H. Beck, Munich, ISBN 3-406-39696-8.

US Patent No. 5,073,953 discloses a method for the automatic segmenting of documents. The picture elements of the document are analyzed according to different types, for example black/white texts, graphics elements, continuous tone images, half-tone images, etc. The document to be analyzed is divided into sub-images and the type is assigned to these sub-images.

Image compression devices are known from German Patent Document DE-C2-38 24 717 and from the publication by W. Crocca et al., "Compression of grey digital images using

grey separations”, Xerox Disclosure Journal, Vol. 15, No. 6, Nov/Dec 1990, pages 481-482. German Patent Document DE-C2-41 27 920 discloses an image processing device wherein image data are subdivided into blocks and the blocks are sequentially processed. German Patent Document DE-C2-29 53 109 and German Patent Document DE-A1-42 15 157 disclose image reception devices. Japanese Patent Document JP-A-11-65793 discloses a method with which data are compressed differently according to the object type (image or text). The contents of the above-cited documents are herewith likewise incorporated by reference into the present specification.

European Patent Document EP 0 774 858 A3 discloses a method for compressing and transmitting image raster data wherein picture elements (pixels) are combined into macro-cells in the fashion of tiles. These macro-cells are assigned to predetermined type classes, for example the type text, graphics, gray scale image, etc. The compression method to be applied is adapted dependent on the information about the type of macro-cell. For compression, the pixels of the respective tile are re-ordered (rescanning), whereby the respectively exposure value of the pixel is defined dependent on the position of the pixel with reference to the center of the macro-cell.

US Patent No. 5,465,173 is directed to an image processing method wherein half-tone image data are stored. The storing ensues block-by-block with a prescribed plurality of pixel data. A compression of the half-tone image data ensues on the basis of the block-by-block data, whereby the memory requirement is reduced.

SUMMARY OF THE INVENTION

An object of the invention is to provide a method and a system for compressing and transmitting image raster data that also works with high efficiency when a page to be transmitted contains gray picture elements.

5 This object is achieved by a method for compressing and transmitting image raster data, whereby a data stream of image raster data is generated from language elements of a graphics language, the data stream containing gray image areas in the form of dither cells whose gray scale values are determined by model dither cells, the image raster data of each and every page are divided into tiles of a two-dimensional grid network, whereby each tile comprises a plurality of image raster data, the appertaining model dither cell and the gray scale value thereof being identified for each tile that contains only dither cells, and this tile being marked, and characteristic data of the marked tiles are transmitted for further processing of the image raster data, whereby these characteristic data contain information about the position of the respective tile and the respective gray scale value.

10 15 A further improvement provides that the dither cells contain rectangularly or quadratically arranged picture elements, and that the model dither cell with higher gray scale value at least contains inked picture elements at the same positions as the model dither cell with the next-lower gray scale value. Additionally, each tile is checked to see whether is contains dither cells of the type of the model dither cell with the lowest gray scale value.

20 Furthermore, the check of the tiles ensues tile row by tile row, whereby the first row is investigated first per tile; and, given a lack of coincidence, the appertaining tile is investigated no further. In particular, the model dither cell with the highest gray scale value that is

contained in all dither cells of a tile is determined for the tile that contains dither cells of the type of the model dither cell with the lowest gray scale value; and the gray scale value of this model dither cell is assigned to this tile.

In one improvement, the tiles have a uniform row length, preferably corresponding to the bit length of the register of a hardware module with which the method is implemented. The row length amounts to 8, 16, 32, 64 or 128 bits or an additive combination thereof. In a preferred development, for determining whether a tile contains dither cells at least with the lowest gray scale value corresponding to a model dither cell, a comparison cell is employed that contains only these model dither cells and whose length at least corresponds to the row length of a tile; and the comparison is implemented tile row by tile row. Furthermore, the length of the comparison row amounts to the smallest common multiple of row length of the tile and row length of the dither cell, which preferably has an 8x8 or 10x10 picture element matrix. An additional advantage is realized when a comparison row with appertaining model dither cells is employed for each gray scale value.

In one embodiment, neighboring tiles having a prescribed gray scale value corresponding to a model dither cell are combined to form a polygon; and the characteristic data of this polygon are transmitted, preferably compressed, for further processing of the image raster data. The polygon is either a square or a rectangle, for example. Specifically, the tiles combined to form a rectangle have a common minimal gray scale value; and the characteristic data of this rectangle are transmitted. The rectangle can contain a sub-rectangle whose tiles have a minimum gray scale value that is higher than the gray scale value of the tiles of the rectangle. In particular, a list of rectangles is produced; and characteristic data of

this list are transmitted, preferably in compressed form. The list is organized such that rectangles with descending plurality of tiles assume a descending rank in the list; and only those rectangles from this list whose plurality of tiles exceeds a predetermined value are transmitted for further processing. The number of rectangles of the list is limited to a predetermined value.

In one further improvement, the dither cells of a row or of a sequence that adjoin a rectangle and have the same minimum gray scale value as the dither cells of the rectangle are incorporated into the expanded rectangle, whereby the boundaries of the rectangles are correspondingly expanded. Preferably, the position of the upper left corner, the height, the width and the gray scale value are determined for each rectangle with reference to a page, and these characteristic data are transmitted, preferably in compressed form.

The raster image data of the marked tiles or of the marked rectangles can be removed from the data stream by subtraction; and the remaining data stream compressed according to a standardized compression method and transmitted. For example, the FAX G4 compression method is employed as standardized compression method. The data of the marked tiles or of the rectangles may be transmitted according to the SPDS data format. As a variation, the transmitted image raster data as re-compiled upon employment of an OR function.

In the method, an RIP module, preferably a POSTSCRIPT converter module is employed for generating the data stream of image raster data from language elements of the graphics language. The present method may be employed for the transmission of print raster data to printers, preferably to high-performance printers. By way of definition, one example of the high-performance printer has a printing output greater than equal to 400 pages DIN A4

per minute at 600 dpi.

The present invention also provides a system for compressing and transmitting image raster data, including an RIP module that generates a data stream of image raster data page-by-page from language elements of a graphics language, the data stream containing gray image areas in the form of dither cells whose gray scale values are determined by model dither cells, the image raster data of each and every page being divided into tiles of a two-dimensional grid network, each tile including a plurality of image raster data, wherein the appertaining model dither cell and the gray scale value thereof are identified for each tile that contains only dither cells and this tile is marked; and characteristic data of the marked tiles are transmitted for further processing of the image raster data, whereby these characteristic data contain information about the position of the respective tile and the respective gray scale value. For example, the dither cells contain rectangularly or quadratically arranged picture elements; and the model dither cell with higher gray scale value at least contains inked picture elements at the same positions as the model dither cell with the next-lower gray scale value. In one embodiment, the system has neighboring tiles with predetermined gray scale value corresponding to a model dither cell are combined to form a polygon; and characteristic data of this polygon are transmitted, preferably compressed, for further processing of the image raster data. The invention provides that the polygon is a square or a rectangle.

In a further method for compressing and transmitting image raster data, a data stream of image raster data is generated page-by-page from language elements of a graphics language, the data stream containing gray picture elements in the form of dither cells whose gray scale values are defined by model dither cells, at least one area is determined that

contains only dither cells, whereby the appertaining model dither cell and the gray scale value thereof is identified and this area is marked; and characteristic data of the marked area are transmitted for further processing of the image raster data, whereby these characteristic data contain information about the position of the respective tile and the respective gray scale value. A preferred development provides that the dither cells contain rectangularly or quadratically arranged picture elements; and the model dither cell with higher gray scale value at least contains inked picture elements at the same positions as the model dither cell with the next-lower gray scale value. The dither cells of a rectangular region have a common minimum gray scale value. A list of rectangles can be produced; and the characteristic data of this list are transmitted, preferably in compressed form.

According to the invention, a computer program product includes a computer-readable medium with which commands are offered in encoded form, these, after the loading of the computer program, causing the computer to implement the steps set forth above. A computer program element may also be provided comprising commands in encoded form that cause the computer to implement the foregoing steps. The computer program element is preferably present on a computer-readable medium. The invention also provides a computer-readable medium that contains a computer program which causes a computer to implement the above set-forth steps.

According to the invention, the image raster data of each and every page are divided into tiles, for example tiles of an identical size, of a two-dimensional grid network. A determination is made for every tile as to whether it exclusively contains dither cells or not. When the former applies, the appertaining model dither cell and the gray scale value thereof

are determined and this tile is marked. When the tile does not exclusively contain dither cells, for example non-inked white parts, then this tile is not further-analyzed. The image raster data of such a tile is compressed according to traditional compression methods.

Characteristic data, for example about the size and the gray scale value, are identified from the marked tiles, and these characteristic data are transmitted as compressed data. The image raster data of such marked tiles need not be compressed according to the traditional compression methods, i.e. they are bracketed out in the traditional compression method. In this way, the traditional compression method can compress a page faster and with higher efficiency since, on the one hand, the compression of marked tiles and, on the other hand, the considerable compression outlay for dither cells are eliminated. According to the inventive method, an added outlay is in fact required overall for the analysis of the tiles and the transmission of the characteristic data of marked tiles. This added outlay, however, is slight compared to the saving in compression outlay for the standardized compression method.

According to a further aspect of the invention, a system for compressing and transmitting image raster data has comprising an RIP module that generates a data stream of image raster data page-by-page from language elements of a graphics language, the data stream containing gray image areas in the form of dither cells whose gray scale values are determined by model dither cells, whereby the image raster data of each and every page are divided into tiles of a two-dimensional grid network, whereby each tile comprises a plurality of image raster data, the appertaining model dither cell and the gray scale value thereof are identified for each tile that contains only dither cells and this tile is marked; and characteristic data of the marked tiles are transmitted for further processing of the image raster data,

whereby these characteristic data contain information about the position of the respective tile and the respective gray scale value. This system has the technical advantages already described above in conjunction with the method.

Further, a method for compressing and transmitting image raster data is provided whereby a data stream of image raster data is generated page-by-page from language elements of a graphics language, said data stream containing gray picture elements in the form of dither cells whose gray scale values are defined by model dither cells, characterized in that at least one area is determined that contains only dither cells, whereby the appertaining model dither cell and the gray scale value thereof is identified and this area is marked; and characteristic data of the marked area are transmitted for further processing of the image raster data, whereby these characteristic data contain information about the position of the respective tile and the respective gray scale value. Given this method, at least one area is identified that contains only dither cells that agree with a pre-defined model dither cell and a gray scale value. The characteristic data of this area are transmitted for further-processing of the image raster data.

According to a further aspect of the invention, a computer program product, a computer program element and a computer-readable medium are provided. The computer program product and the computer program element contain commands and data for the control of a computer. After the loading of the computer program product or, respectively, of the computer program element that, for example, is loaded as a software module either individually or together with other software modules, the method steps defined in the claims are implemented when the commands are processed and the technical result is achieved. A

diskette, a magnetic or optical storage disk (CD ROM), a data carrier tape or a remote memory can be employed as a computer-readable medium, a computer program being transmitted and loaded therefrom by remote data transmission, for example via the Internet.

BRIEF DESCRIPTION OF THE DRAWINGS

An exemplary embodiment of the invention is explained below on the basis of the drawings.

Figures 1A and 1B are illustrations of model dither cells with overlap of the inked picture elements.

Figure 2 is a diagram showing the division of a page into tiles with the assistance of a grid network

Figure 3 is a schematic illustration of a search algorithm upon employment of comparison lines composed of tiles.

Figures 4, 5 and 6 are schematic illustrations of a search algorithm for fixing the gray scale value of a tile.

Figure 7 is an illustration of the combining of tiles to form rectangles.

Figure 8 is an illustration of the deletion of a rectangle.

Figure 9 is a schematic showing of an expansion possibility for a rectangle.

Figure 10 is a schematic showing of the fixing of the bit length of a comparison line.

Figure 11 is a flow diagram of the transmission of the image raster data upon employment of the inventive method.

Figure 12 is an illustration of the inventive method in a block diagram.

Figure 13 is a block diagram of a traditional method for compressing and transmitting image raster data according to the Prior Art.

Figure 14 is a flowchart with method steps for allocating gray scale values to tiles.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

5 Figures 1A and 1B show the structure of two model dither cells A and B. Both model dither cells A and B have 10 times 10 picture elements, i.e. the row length amounts to 10 picture elements and the column length likewise amounts to 10 picture elements. The model dither cell A contains black-colored picture elements in the middle in the fashion of a cross. The model dither cell B contains black-colored picture elements in the middle that together yield an L pointing to the left. The model dither cell B contains fewer black-colored picture elements than the model dither cell A. Accordingly, the gray of the model dither cell B is lighter than the gray of the model dither cell A. This means that the gray scale value of the model dither cell B is lower than the gray scale value of the model dither cell A. It is generally true for the arrangement of the black-colored picture elements of model dither cells that the model dither cell with the higher gray scale value contains inked picture elements at least at identical positions as the model dither cell with the next-lower gray scale value. This means that inked picture elements of model dither cells with a higher gray scale value overlap the inked picture elements of model dither cells with a lower gray scale value. In Figure 1A, the darker model dither cell A has black-colored picture elements at identical positions as the model dither cell B in Figure 1B. In addition, further picture elements are colored black in the model dither cell A.

Theoretically, a plurality of gray scale values can be realized with the assistance of a plurality of model dither cells in the fashion of the model dither cells A and B shown in Figures 1A and 1B, whereby the lowest gray scale value is defined by a single black-colored picture element, and the highest gray scale value is present when all picture elements of the dither cell are colored black. In practice, a smaller plurality of gray scale values than the theoretically possible plurality and a correspondingly reduced plurality of model dither cells are employed, for example 16 or 32. In this example, the gray scale value then has a value range from 1 through 16 or, respectively, 1 through 32. An extreme gray scale value 0 means that none of the picture elements is colored black; in this respect, this is not a dither cell but a white, unprinted surface. Let it also be pointed out that two types of dither cell that have either 10 times 10 picture elements or 8 times 8 picture elements in a matrix arrangement dominate in practice.

Figure 2 schematically shows the division of a page S into identically sized tiles K1, K2, Ki through Kn of a two-dimensional grid network GN. Each tile K contains a plurality of image raster data in data lines of equal length. Within a tile row K1 through Ki, the tiles are processed from left to right in the search algorithm that shall be subsequently described; the tile rows are processed from top to bottom. However, some other processing sequence is also conceivable.

Figure 3 schematically shows the procedure for determining dither cells that are contained in a tile Ka. First, comparison rows Vz1, Vz2, Vz3 and Vz4 are offered that have at least the same row length as the tiles K1 through Kn. For greater clarity, only four comparison rows Vz1 through Vz4 are employed. In practice, just as many comparison rows

are offered as there are gray scale values defined by the model dither cells. Each comparison row Vz1 through Vz4 contains identical model dither cells with a specific gray scale value.

The comparison row Vz1 contains model dither cells with a gray scale value $G=1$, the comparison row Vz2 contains model dither cells with a gray scale value $G=2$, the comparison row Vz3 contains model dither cells with a gray scale value $G=3$, and the comparison row Vz4 contains model dither cells with a gray scale value $G=4$. Comparison row Vz1 thus contains the fewest black-colored picture elements. The comparison row Vz2 with the next higher gray scale value $G=2$ contains black-colored picture elements of the model dither cell with the gray scale value $G=1$ at the same raster positions and additional black-colored picture elements. The model dither cells of the comparison row Vz3 having the next-higher gray scale value $G=3$ contains the black-colored picture elements of the model dither cells of the comparison rows Vz1 and Vz2 at the same positions as well as additional black-colored picture elements. The similar case applies to the model dither cells of the comparison row Vz4.

Due to the overlap of the inked picture elements of the model dither cells of the comparison row Vz1 through Vz4, it suffices for locating dither cells in the various tiles when a coincidence of the first row of each and every tile K with the comparison row Vz1 is merely found in the first search step, as schematically shown in Figure 3 on the basis of the tile Ka. Tiles such as, for example, the tile K1 that already do not coincide with the comparison row Vz1 in their first row are no longer taken into consideration in the rest of the process. Such tiles are assigned the extreme gray scale value $G=0$, i.e. they do not generally contain dither cells in the first row that coincide with the model dither cell having the gray

scale value $G=1$. The search for tiles within a page that have dither cells with at least the gray scale value $G=1$ thus ensues very fast when the tile size is selected appropriately large. It can already be seen here that the method of the invention works very fast due to the division according to tiles.

Figure 4 schematically shows the next step, whereby what actual gray scale value G the first row $z1$ of the tile Ka is determined within the tile Ka by comparison to the comparison rows $Vz1$ through $Vz4$. In the present case, it is found that there is coincidence between comparison row $Vz3$ and the first row $z1$ of the tile Ka , i.e. the gray scale value is $G=3$.

Figure 5 schematically shows the next step wherein a finding is made within the tile Ka as to whether at least all rows $z1$ through $z5$ with dither cells contains the gray scale value $G=3$ that had been found in the preceding step (Figure 4). In the present case, all rows $z1$ through $z5$ of the tile Ka contains at least the gray sale value $G=3$ in conformity with the comparison row $Vz3$. Two rows $z2$ and $z3$ have a higher gray scale value $G>3$, i.e. are darker. This is allowed since model dither cells with a higher gray scale value have colored the same picture elements black as model dither cells with a lower gray scale value. When, however, the gray scale value G is lower than found in the first row $z1$, then a branch is made to the next step, which is schematically shown in Figure 6.

It is shown in Figure 6 that the row $z3$ coincides with the comparison row $Vz1$, i.e. has the lowest gray scale value $G=1$. In this case, the entire tile Ka has the gray scale value $G=1$ allocated to it since this gray scale value G is at least also contained in all other rows $z1$ through $z5$ of the tile Ka . If, however, a gray scale value were found in a row that does not

coincide with a model dither cell, for example the extreme gray scale value $G=0$ (which means that no comparison row fits), then the value $G=0$ is assigned to this tile and it is no longer taken into consideration in the continuing process.

It is to be pointed out that the comparison rows $Vz1$ through $Vz4$ that have dither cells arranged in them in row form in turn contain picture element rows. In practice, the comparison of the comparison rows $Vz1$ through $Vz4$ to dither cells of the tile Ka is implemented on the basis of such picture element rows. Instead of comparison rows $Vz1$ through $Vz4$, comparison tiles can also be employed whose size corresponds to the tile Ka and that contain a plurality of rows of dither cells.

Figure 7 schematically shows a part of a page with tiles K to which gray scale values $G=0, 1, 2$ or 3 have been assigned. This assigning of gray scale values corresponds to a marking. The value $G=0$ means that no standard gray scale value was capable of being found for this tile, for example because such a tile does not generally contain dither cells with the lowest gray scale value (gray scale value $G=1$).

The tiles shown in Figure 7 are investigated tile row by tile row from left to right. Tiles having the value $G=0$ are not taken into consideration. Tiles lying next to one another having the same value, in this case the gray scale value $G=3$, are combined to form a rectangle Ra . In this way, larger areas of the page S having the same gray picture elements are combined.

Another modification in the search for rectangles provides that tiles that contain the same gray scale value (for example, gray scale value $G=1$) or a higher gray scale value (for example, gray scale value $G=2$ or $G=3$) are combined to form rectangles. The rectangle Rb

shows the combination of 6 tiles that contain the gray scale values $G=1$ or $G=2$. Such a combination is expedient since dither cells with gray scale value $G=2$ have black-colored picture elements at the same positions as dither cells with gray scale value $G=1$, as already explained above. Overall, the gray scale value $G=1$ is assigned to the rectangle R_b , i.e. the lowest gray scale value G within the rectangle R_b . An excess of black-colored picture elements thus remains for the tiles with gray scale value $G=2$. This excess derives when dither cells with gray scale value $G=1$ are subtracted from all dither cells of the rectangle R_b in a subtraction step. These excess picture elements are compressed as image raster data according to the traditional standard compression method and are transmitted.

Figure 8 shows the further treatment of the rectangle R_a within the image raster data of a page S . The position of the upper left corner of the rectangle R_a is identified as characteristic data for the rectangle R_a . Further, the height and width as well as the gray scale value G , the gray scale value $G=3$ in this case, are identified. These characteristic data are entered into a list of rectangles that lists further rectangles of the type of rectangle R_a . Subsequently, the rectangle R_a within the page S is cleaned, i.e. the value $G=0$ is assigned to the tiles of the rectangle R_a , so that these tiles are no longer taken into consideration in the search for further rectangles. The analysis of the page S has been ended, when the entire page S has been searched for tiles that can be combined to form rectangles and the characteristic data of the rectangles have been entered into the list.

The list of rectangles can be sorted in a next step. Rectangles having a decreasing number of tiles are given a decreasing rank in the list. Only those rectangles whose number of tiles exceeds a predetermined value are then selected from this list and their characteristic

data separately transmitted. In this way, only gray picture elements that are contained in large-area rectangles are separately transmitted. The efficiency of the compression method is further enhanced as a result thereof. A decision to discard a rectangle can already be made during the process of forming rectangles in this case and, thus, the discarded tiles can be made available in the formation of other rectangles. The efficiency of the compression method is further enhanced as a result thereof.

Another modification can be comprised therein that the number of rectangles of the list is limited to a predetermined value. Since the transmission of the characteristic data of rectangles means an additional compression outlay and this outlay increases given a great number of rectangles, it is expedient to limit this number.

Figure 9 shows a further modification of the formation of rectangles whose boundaries need not coincide with tile boundaries. When, as shown in Figure 7, tiles have been combined to form rectangles, then the boundaries of these rectangles coincide with tile boundaries. When, however, dither cells with the same gray scale value as those within a rectangle adjoin such a rectangle in terms of row or column and have the same minimum gray scale value G as the dither cells of the rectangle, then these dither cells can be co-incorporated into the rectangle. The height and width of the respective rectangle must then be correspondingly increased. The boundaries of the rectangles are thus enlarged to the same extent as the identical gray raster actually occurs as a rectangle in the original of a page S . The efficiency of the inventive compression method is further enhanced in this way.

Figure 9 shows three rectangles R_c , R_d , R_e with solid bold-face lines. The rectangles R_c and R_e have a gray scale value $G=2$. The rectangle R_d has a gray scale value $G=4$. Dither

cells whose gray scale values G agree with those of the respective rectangles adjoin the rectangles R_c , R_d , R_e . The individual rectangles R_c , R_d and R_e can be correspondingly enlarged in their respective height and length. Over and above this, it is possible to combine all enlarged rectangles to form a single rectangle R_f . This rectangle R_f then has the minimum gray scale value of all enlarged rectangles R_c , R_d and R_e , namely the gray scale value $G=2$. In Figure 9, R_d is a sub-rectangle with $G=4$ within the overall rectangle R_f with $G=2$. The overall gray scale value is $G=2$, this being transmitted as characteristic datum for the rectangle R_f . It is also possible to employ an inverse presentation for which the gray scale value $G=4$ is transmitted as a characteristic datum for the rectangle R_f . During further processing of the image data, the reduced gray scale value $G=2$ is then to be taken into consideration for the further rectangles R_c and R_e .

Figure 10 shows another modification wherein the size of the dither cells and the row length as well as the column length of a tile are taken into consideration. Usually, dither cells have an 8×8 or a 10×10 picture element matrix. The bit width of the registers of the computer hardware employed for realizing the inventive method is preferably suited as row length for a tile. Row lengths of 8, 16, 32, 64 or 128 are customary. An additive combination of the row lengths is likewise possible, for example an overall row length composed of the combination of 8 bits + 32 bits = 40 bits, etc. Since the row length of the dither cells need not coincide with the row length of the tiles, it is expedient that the aforementioned comparison rows $Vz1$ through $Vz4$ have a length corresponding to the smallest common multiple of the row length of the tiles and the row length of the dither cells D . In the example of Figure 10, the dither cells D have a row and column length of 10. The tiles, for example the tile $K1$, have a row

and column length of 32 bits, i.e. the tile K1 -- in terms of length and width -- comprises 3 dither cells as well as 2 columns or, respectively, rows of the next, adjacent dither cells. The smallest common multiple of row length of the tile K1 and row length of the dither cell D amounts to 160 bits. It is therefore expedient to equip the comparison rows Vz1 through Vz4 with a row length of 160 bits. Given a register width of 32 bits, a comparison within a tile row of 5 tiles, i.e. 16 dither cells, can be simultaneously implemented in this case with the assistance of 5 double word operations. Such double word operations can be executed very fast with the assistance of registers.

Figure 11 shows the principle of the invention employed for compressing and transmitting the image raster data. The image raster data BD of a page S generated by the RIP module are analyzed according to the aforementioned method steps and rectangles R1 and R2 with identical dither cells are thereby identified. These two rectangles R1 and R2 on the page S are blanked out from the overall image raster data BD, for example with a subtraction method. The remaining image raster data E are transmitted according to a traditional standard compression method, for example according to the FAX G4 compression method. However, other compression methods are conceivable, for example those that work according to the run length encoding method. The characteristic data of the rectangles R1 and R2 are separately transmitted, whereby a list L of rectangles is preferably employed and only these list data are transmitted. At the receiver side, the data that have been transmitted according to the standard compression method as well as the image raster data BD of the rectangles R1 and R2 are re-compiled. In this way, not all image raster data BD of the page S need be compressed according to the standard compression method and transmitted, but only

the data E, i.e. with the exception of the rectangles R1 and R2. It is to be pointed out that not all gray picture elements with identical dither cells need be combined to form rectangles. For an improved reduction of the data stream to be transmitted and of the processing time in the compression, it suffices when approximately 80 to 90% of all identical dither cells are covered.

Figure 12 shows a block diagram of a schematic illustration of the inventive method or, respectively, of the inventive system. In a computer 10, an RIP module RIP generates image raster data from language elements of the printer language POSTSCRIPT PS that are investigated in the computer 10 with a corresponding computer program according to the above-described analysis steps, these corresponding to a filter function in a raster filter. Using a diskette 11, the computer program can have been loaded into the computer 10 on a permanent storage (hard disk) or into a volatile main memory (RAM). The image raster data that still remain per printed page after subtraction of the identified rectangles are compressed in the computer 10 according to the FAX G4 compression method and are packed according to the data formats IOCA and/or SPDS. The data format IOCA is described in the IOCA reference manual, "Image Object Content Architecture" Reference, 4th Edition (August 1993) SC31-6805-03, International Business Machines Corporation. The data format SPDS is described in the SPDS reference manual "SPDS", Edition of 11.94, U 9737-J-Z247-3, Océ Printing Systems GmbH. Both documents are herewith incorporated by reference into the disclosure of the present application.

The data with a high packing density are stored in a datafile Da in a volatile or permanent memory, particularly in the computer. The list of rectangles determined in the

filtering steps is packed with high packing density according to the data format SPDS and is likewise stored in the datafile Da. The generation of the compressed data can be accelerated with the assistance of the filter function, i.e. an abbreviated time is needed for the editing of the data. The printer accesses the datafile Da, whereby the data volume to be transmitted to the printer is small due to the high packing density and the high informational content. An adequately great quantity of data can thus be transmitted with a given data transmission rate. This means that the printer, as a high-performance printer with a high printing output, is adequately supplied with image raster data even given printed pages with many identical, gray picture areas and can print interruption-free at a high printing speed. The printer likewise contains a computer or a controller with a decompression program with the assistance of the data of the datafile Da are converted into further-processable print data. Preferably, the decompression program contains an OR function with which the image raster data of the rectangles and the image raster data that are transmitted in a traditional way are combined to form common image raster data.

Figure 13 shows the structure of a traditional system. The image raster data of the RIP module are compressed exclusively according to a standard compression method, for example the FAX G4 compression method and are then stored in a datafile Da as data with a high packing density, being stored with the assistance of the IOCA and/or SPDS data format. Since many data arise for each identical gray picture element, the memory requirement for the datafile Da is very high. Likewise, the compression algorithms for compressing the corresponding image raster data for identical gray picture elements are extensive and time-consuming. During printing, the printer accesses the data in the datafile Da. Since a

considerable data volume is to be processed but the data transmission rate from the datafile Da to the printer is limited, it can occur that the printer can print faster than data can be offered via the datafile Da. A brief stoppage of the printing event occurs in this case. Such a start-stop operation, however, is extremely disruptive for a high-performance printer; it performance capability is only inadequately used. Typically, such a high-performance printer has a printing output greater than 400 pages DIN A4 per minute given a resolution of 600 dpi (dots per inch).

Using a flowchart, Figure 14 schematically shows method steps as were already explained in Figures 3 through 6. These method steps serve the purpose of determining a gray scale value $G=0$ or a higher gray scale value G for a tile K . As mentioned, a gray scale value $G=0$ is assigned when a row z of a tile K contains no gray picture element, i.e. no dither cell. Figure 14 only shows critical steps that serve the purpose of explaining the fundamentals of the method. Required intermediate steps, for example the definition of initial conditions for run variables, the modification of run variables, etc., are familiar to a person skilled in the art active in this field.

After the start (step S1), a check is carried out in step S2 whether all tiles K of a page have already been processed. When this applies, then the entire step sequence for a page is ended in step S3. When all tiles K have not yet been processed, then a check is carried out in the following step S4 whether the appertaining tile K has its first row $z1$ coinciding with the comparison row $Vz1$ that, as mentioned, has the lowest gray scale value $G=1$. When no coincidence is found, then the extreme gray scale value $G=0$ is assigned to this tile K in step S5 and a branch is made to step S6. In this step S6, the tile run variable k is incremented by 1

and a branch is made to step S2.

When it is found in step S4 that the first row z_1 coincides at least with the comparison line Vz_1 , then a determination is made in the next step S7 as to whether there are comparison rows Vz_2 , Vz_3 and Vz_4 with a higher gray scale value G that coincide with the first row z_1 .

5 The comparison row Vz_i (i is a run variable) with the highest gray scale value G is then further-employed. The following step S8 is explained later. In the step S9 following thereupon, a determination is made for every row z_j (wherein j is a run variable for the row number) of the same tile K as to whether it coincides with the comparison row Vz_i found in step S7. When this does not apply, then the run variable i is lowered by 1 in step S10, i.e. a comparison row Vz_i with the next-lower gray scale value G is employed for the further analysis. Whether the extreme gray scale value $G=0$ is reached is then found in step S8. When this applies, then a branch is made to step S6 and the next tile K is analyzed. The gray scale value $G=0$ means that a white picture element to which no gray scale value can be assigned occurs within the tile K .

15 In step S11, the gray scale value G for the appertaining tile K is then determined. This gray scale value G states that dither cells of at least this gray scale value G are present in all rows z_j of this tile. A higher gray scale value G is possible.

Although other modifications and changes may be suggested by those skilled in the art, it is the intention of the inventors to embody within the patent warranted hereon all
20 changes and modifications as reasonably and properly come within the scope of their contribution to the art.

This redlined draft, generated by CompareRite (TM) - The Instant Redliner, shows the differences between -

original document : P:\H&S C DRIVE\MYFILES\1044\PCT\P010293 REVISED TRANS.WPD
and revised document: P:\H&S C DRIVE\MYFILES\1044\PCT\P010293 SUB SPEC.WPD

CompareRite found 96 change(s) in the text

Deletions appear as Strikethrough text

Additions appear as Bold-Underline text

10/009539
JC13 Rec'd PCT/PTO 29 OCT 2001

9/psb

SPECIFICATION

TITLE

"METHOD, SYSTEM AND COMPUTER PROGRAM FOR COMPRESSING
AND TRANSMITTING IMAGE RASTER DATA"

BACKGROUND OF THE INVENTION

Field of the Invention

The present ~~The~~ invention relates to a method for compressing and transmitting image raster data, whereby a data stream of image raster data is generated page-by-page from language elements of a graphics language, ~~said~~ the data stream containing gray image areas in the form of dither cells whose gray scale values are determined by model dither cells. The invention also relates to a system for compressing and transmitting image raster data upon employment of the aforementioned method. The invention also relates to a computer system with whose assistance a computer can implement the method.

Description of the Related Art

It is not only black/white structures but also gray image areas that have a prescribed gray scale value that are being increasingly being employed when printing text and drawings. When, for example, an RIP module generates a data stream of image raster data page-by-page from language elements of a graphics language, for example the known printer language POSTSCRIPT, a noticeably larger dataset must be processed due to the gray image areas that are produced by dithering. The RIP module (RIP = raster image processing) is generally arranged outside the printer; this means that its image raster data must be

compressed in order to be able to transmit ~~these~~ the data in time-conforming fashion with a given data transmission rate. ~~Let an~~ The following example ~~make~~ makes this clear: A DIN A4 page contains approximately 4.3 megabytes of image raster data given a pixel density of 600 dpi (dots per inch). A high-performance printer has the capability of printing more than 400 DIN A4 pages per minute at 600 dpi. Accordingly, a data rate of more than 28 megabytes/s would have to be governed without compression.

Up to now, the image raster data were compressed with the assistance of a standardized compression method, for example the FAX G4 compression method, and were intermediately stored and/or directly transmitted to the printer in this compressed form. For example, International Patent Application No. PCT/DE95/01293, which claims the priority of German Patent Application No. 44 34 068.0, references compression methods in conjunction with printers. ~~Said document is to be included in the disclosure of this application~~ The PCT Application PCT/DE95/01293 is incorporated hereby by reference. When a printed page contains either no or only a few gray raster image areas, the compression time is relatively short and the efficiency of the compression is relatively high. When, however, a page contains a great proportion of gray raster image regions, then the compression time lengthens exponentially and the compression efficiency becomes low.

Picture elements in the form of gray rasters are often generated upon employment of the dithering method. In this dithering method, gray scales are generated by employing dot patterns (rasters). The dithering method exploits a unique property of the human eye: individual picture elements are no longer perceived beyond a specific viewer distance and a specific dot density, but blur to form a gray scale value. A dither cell, accordingly, contains a

plurality of picture elements; of which only one picture element, several picture elements or all picture elements of a dither cell are inked dependent on the desired gray scale value. In order to achieve a good melding of the picture elements, the inked picture elements are scattered according to a predetermined algorithm. The gray scale values themselves are fixed by given model dither cells. When a dither cell contains 8x8 picture elements in the form of a matrix and a symmetrical arrangement of the inked picture elements is prescribed, then 32 or 64 gray scale values can be realized. Since dither cells and the distribution of the inked picture elements are relatively complex, standard compression methods for the reduction of the data volume often fail.

Section 6 in Das Druckerbuch of Océ Printing Systems GmbH, 3rd Edition, 1998, ISBN 3-00-001019-X describes raster technique, whereby a dither technique is also addressed. Among others, the dot pattern method is described as a dither technique. Said The above document is ~~to be included~~ incorporated herein by reference in the disclosure of the present application.

The dithering method is also described in Das große Data Becker Computer Lexikon, 1997 Edition, ISBN 3-8158-1575-4, and in Computer Lexikon, Verlag C. H. Beck, Munich, ISBN 3-406-39696-8.

US ~~A~~ Patent No. 5,073,953 discloses a method for the automatic segmenting of documents. The picture elements of the document are analyzed according to different types, for example black/white texts, graphics elements, continuous tone images, half-tone images, etc. The document to be analyzed is divided into sub-images and the type is assigned to these

sub-images.

Image compression ~~device~~ [sic] devices are known from German Patent Document DE-C2-38 24 717 and from the publication by W. Crocca et al., "Compression of grey digital images using grey separations", Xerox Disclosure Journal, Vol. 15, No. 6, Nov/Dec 1990, pages 481-482. German Patent Document DE-C2-41 27 920 discloses an image processing device wherein image data are subdivided into blocks and the blocks are sequentially processed. German Patent Document DE-C2-29 53 109 and German Patent Document DE-A1-42 15 157 disclose image reception devices. Japanese Patent Document JP-A-11-65793 discloses a method with which data are compressed differently according to the object type (image or text). The contents of the above-cited documents are herewith likewise incorporated by reference into the present specification.

European Patent Document EP 0 774 858 A3 discloses a method for compressing and transmitting image raster data wherein picture elements (pixels) are combined into macro-cells in the fashion of tiles. These macro-cells are assigned to predetermined type classes, for example the type text, graphics, gray scale image, etc. The compression method to be applied is adapted dependent on the information about the type of macro-cell. For compression, the pixels of the respective tile are re-ordered (rescanning), whereby the respectively exposure value of the pixel is defined dependent on the position of the pixel with reference to the center of the macro-cell.

US ~~A~~ Patent No. 5,465,173 is directed to an image processing method wherein half-tone image data are stored. The storing ensues block-by-block with a prescribed plurality of pixel data. A compression of the half-tone image data ensues on the basis of the

block-by-block data, whereby the memory requirement is reduced.

SUMMARY OF THE INVENTION

An object of the invention is to ~~specify~~ **provide** a method and a system for compressing and transmitting image raster data that also works with high efficiency when a page to be transmitted contains gray picture elements.

This object is achieved ~~for a method with the features of claim 1. Advantageous developments are recited in the subclaims:~~ **by a method for compressing and transmitting image raster data, whereby a data stream of image raster data is generated from language elements of a graphics language, the data stream containing gray image areas in the form of dither cells whose gray scale values are determined by model dither cells, the image raster data of each and every page are divided into tiles of a two-dimensional grid network, whereby each tile comprises a plurality of image raster data, the appertaining model dither cell and the gray scale value thereof being identified for each tile that contains only dither cells, and this tile being marked, and characteristic data of the marked tiles are transmitted for further processing of the image raster data, whereby these characteristic data contain information about the position of the respective tile and the respective gray scale value.**

A further improvement provides that the dither cells contain rectangularly or quadratically arranged picture elements, and that the model dither cell with higher

gray scale value at least contains inked picture elements at the same positions as the model dither cell with the next-lower gray scale value. Additionally, each tile is checked to see whether it contains dither cells of the type of the model dither cell with the lowest gray scale value. Furthermore, the check of the tiles ensues tile row by tile row, whereby the first row is investigated first per tile; and, given a lack of coincidence, the appertaining tile is investigated no further. In particular, the model dither cell with the highest gray scale value that is contained in all dither cells of a tile is determined for the tile that contains dither cells of the type of the model dither cell with the lowest gray scale value; and the gray scale value of this model dither cell is assigned to this tile.

In one improvement, the tiles have a uniform row length, preferably corresponding to the bit length of the register of a hardware module with which the method is implemented. The row length amounts to 8, 16, 32, 64 or 128 bits or an additive combination thereof. In a preferred development, for determining whether a tile contains dither cells at least with the lowest gray scale value corresponding to a model dither cell, a comparison cell is employed that contains only these model dither cells and whose length at least corresponds to the row length of a tile; and the comparison is implemented tile row by tile row. Furthermore, the length of the comparison row amounts to the smallest common multiple of row length of the tile and row length of the dither cell, which preferably has an 8x8 or 10x10 picture element matrix. An additional advantage is realized when a comparison row with appertaining model dither cells is employed for each gray scale value.

In one embodiment, neighboring tiles having a prescribed gray scale value

corresponding to a model dither cell are combined to form a polygon; and the characteristic data of this polygon are transmitted, preferably compressed, for further processing of the image raster data. The polygon is either a square or a rectangle, for example. Specifically, the tiles combined to form a rectangle have a common minimal gray scale value; and the characteristic data of this rectangle are transmitted. The rectangle can contain a sub-rectangle whose tiles have a minimum gray scale value that is higher than the gray scale value of the tiles of the rectangle. In particular, a list of rectangles is produced; and characteristic data of this list are transmitted, preferably in compressed form. The list is organized such that rectangles with descending plurality of tiles assume a descending rank in the list; and only those rectangles from this list whose plurality of tiles exceeds a predetermined value are transmitted for further processing. The number of rectangles of the list is limited to a predetermined value.

In one further improvement, the dither cells of a row or of a sequence that adjoin a rectangle and have the same minimum gray scale value as the dither cells of the rectangle are incorporated into the expanded rectangle, whereby the boundaries of the rectangles are correspondingly expanded. Preferably, the position of the upper left corner, the height, the width and the gray scale value are determined for each rectangle with reference to a page, and these characteristic data are transmitted, preferably in compressed form.

The raster image data of the marked tiles or of the marked rectangles can be removed from the data stream by subtraction; and the remaining data stream compressed according to a standardized compression method and transmitted. For

example, the FAX G4 compression method is employed as standardized compression method. The data of the marked tiles or of the rectangles may be transmitted according to the SPDS data format. As a variation, the transmitted image raster data as re-compiled upon employment of an OR function.

5 In the method, an RIP module, preferably a POSTSCRIPT converter module is employed for generating the data stream of image raster data from language elements of the graphics language. The present method may be employed for the transmission of print raster data to printers, preferably to high-performance printers. By way of definition, one example of the high-performance printer has a printing output greater than equal to 400 pages DIN A4 per minute at 600 dpi.

15 The present invention also provides a system for compressing and transmitting image raster data, including an RIP module that generates a data stream of image raster data page-by-page from language elements of a graphics language, the data stream containing gray image areas in the form of dither cells whose gray scale values are determined by model dither cells, the image raster data of each and every page being divided into tiles of a two-dimensional grid network, each tile including a plurality of image raster data, wherein the appertaining model dither cell and the gray scale value thereof are identified for each tile that contains only dither cells and this tile is marked; and characteristic data of the marked tiles are transmitted for further
20 processing of the image raster data, whereby these characteristic data contain information about the position of the respective tile and the respective gray scale value. For example, the dither cells contain rectangularly or quadratically arranged picture

elements; and the model dither cell with higher gray scale value at least contains inked picture elements at the same positions as the model dither cell with the next-lower gray scale value. In one embodiment, the system has neighboring tiles with predetermined gray scale value corresponding to a model dither cell are combined to form a polygon; and characteristic data of this polygon are transmitted, preferably compressed, for further processing of the image raster data. The invention provides that the polygon is a square or a rectangle.

In a further method for compressing and transmitting image raster data, a data stream of image raster data is generated page-by-page from language elements of a graphics language, the data stream containing gray picture elements in the form of dither cells whose gray scale values are defined by model dither cells, at least one area is determined that contains only dither cells, whereby the appertaining model dither cell and the gray scale value thereof is identified and this area is marked; and characteristic data of the marked area are transmitted for further processing of the image raster data, whereby these characteristic data contain information about the position of the respective tile and the respective gray scale value. A preferred development provides that the dither cells contain rectangularly or quadratically arranged picture elements; and the model dither cell with higher gray scale value at least contains inked picture elements at the same positions as the model dither cell with the next-lower gray scale value. The dither cells of a rectangular region have a common minimum gray scale value. A list of rectangles can be produced; and the characteristic data of this list are transmitted, preferably in compressed form.

According to the invention, a computer program product includes a computer-readable medium with which commands are offered in encoded form, these, after the loading of the computer program, causing the computer to implement the steps set forth above. A computer program element may also be provided comprising commands in encoded form that cause the computer to implement the foregoing steps. The computer program element is preferably present on a computer-readable medium. The invention also provides a computer-readable medium that contains a computer program which causes a computer to implement the above set-forth steps.

According to the invention, the image raster data of each and every page are divided into tiles, for example tiles of an identical size, of a two-dimensional grid network. A determination is made for every tile as to whether it exclusively contains dither cells or not. When the former applies, the appertaining model dither cell and the gray scale value thereof are determined and this tile is marked. When the tile does not exclusively contain dither cells, for example non-inked white parts, then this tile is not further-analyzed. The image raster data of such a tile are is compressed according to traditional compression methods. Characteristic data, for example about the size and the gray scale value, are identified from the marked tiles, and these characteristic data are transmitted as compressed data. The image raster data of such marked tiles need not be compressed according to the traditional compression methods, i.e. they are bracketed out in the traditional compression method. In this way, the traditional compression method can compress a page faster and with higher efficiency since, on the one hand, the compression of marked tiles and, on the other hand, the considerable

compression outlay for dither cells are eliminated. According to the inventive method, an added outlay is in fact required overall for the analysis of the tiles and the transmission of the characteristic data of marked tiles. This added outlay, however, is slight compared to the saving in compression outlay for the standardized compression method.

5 According to a further aspect of the invention, a system for compressing and transmitting image raster data ~~having the features of claim 27 is recited~~ **has comprising an RIP module that generates a data stream of image raster data page-by-page from language elements of a graphics language, the data stream containing gray image areas in the form of dither cells whose gray scale values are determined by model dither cells, whereby the image raster data of each and every page are divided into tiles of a two-dimensional grid network, whereby each tile comprises a plurality of image raster data, the appertaining model dither cell and the gray scale value thereof are identified for each tile that contains only dither cells and this tile is marked; and characteristic data of the marked tiles are transmitted for further processing of the image raster data, whereby these characteristic data contain information about the position of the respective tile and the respective gray scale value.** This system has the technical advantages already described above in conjunction with the method.

Further, a method for compressing and transmitting image raster data ~~having the features of claim 31 is recited~~ **is provided whereby a data stream of image raster data is generated page-by-page from language elements of a graphics language, said data stream containing gray picture elements in the form of dither cells whose gray scale values are defined by model dither cells, characterized in that at least one area is**

determined that contains only dither cells, whereby the appertaining model dither cell and the gray scale value thereof is identified and this area is marked; and characteristic data of the marked area are transmitted for further processing of the image raster data, whereby these characteristic data contain information about the position of the
5 respective tile and the respective gray scale value. Given this method, at least one area is

identified that contains only dither cells that agrees [sic] agree with a pre-defined model dither cell and a gray scale value. The characteristic data of this area are transmitted for further-processing of the image raster data.

According to a further aspect of the invention, a computer program product, a computer program element and a computer-readable medium are ~~recited according to claims 35, 36 or, respectively, 38~~ provided. The computer program product and the computer program element contain commands and data for the control of a computer. After the loading of the computer program product or, respectively, of the computer program element that, for example, is loaded as a software module either individually or together with other software modules, the method steps defined in the claims are implemented when the commands are processed and the technical result is achieved. A diskette, a magnetic or optical storage disk (CD ROM), a data carrier tape or a remote memory can be employed as a computer-readable medium, a computer program being transmitted and loaded therefrom by remote data transmission, for example via the Internet.

BRIEF DESCRIPTION OF THE DRAWINGS

An exemplary embodiment of the invention is explained below on the basis of the

drawings.

Shown therein are:

~~Figure 1~~ **Figures 1A and 1B are illustrations of** model dither cells with overlap of the inked picture elements;

5 **Figure 2 is a diagram showing** the division of a page into tiles with the assistance of a grid network;

Figure 3 is a schematic illustration of a search algorithm upon employment of comparison lines composed of tiles;

Figures 4,
5 and 6 **are schematic illustrations of** a search algorithm for fixing the gray scale value of a tile;

Figure 7 is an illustration of the combining of tiles to form rectangles;

Figure 8 is an illustration of the deletion of a rectangle;

Figure 9 is a schematic showing of an expansion possibility for a rectangle;

15 **Figure 10 is a schematic showing of** the fixing of the bit length of a comparison line;

Figure 11 is a flow diagram of the transmission of the image raster data upon employment of the inventive method;

Figure 12 is an illustration of the inventive method in a block diagram; ~~and.~~

Figure 13 is a block diagram of a traditional method for compressing and
20 transmitting image raster data according to the Prior Art; ~~and.~~

Figure 14 is a flowchart with method steps for allocating gray scale values to tiles.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Figures 1A and 1B show Figure shows the structure of two model dither cells A and B. Both model dither cells A; **and** B have 10 times 10 picture elements, i.e. the row length amounts to 10 picture elements and the column length likewise amounts to 10 picture elements. The model dither cell A contains black-colored picture elements in the middle in the fashion of a cross. The model dither cell B contains black-colored picture elements in the middle that together yield an L pointing to the left. The model dither cell B contains fewer black-colored picture elements than the model dither cell A. Accordingly, the gray of the model dither cell B is lighter than the gray of the model dither cell A. This means that the gray scale value of the model dither cell B is lower than the gray scale value of the model dither cell A. ~~Generally valid~~ **It is generally true** for the arrangement of the black-colored picture elements of model dither cells is that the model dither cell with the higher gray scale value contains inked picture elements at least at identical positions as the model dither cell with the next-lower gray scale value. This means that inked picture elements of model dither cells with a higher gray scale value overlap the inked picture elements of model dither cells with a lower gray scale value. In Figure † **1A**, the darker model dither cell A has black-colored picture elements at identical positions as the model dither cell B **in Figure 1B**. In addition, further picture elements are colored black in the model dither cell A.

Theoretically, a plurality of gray scale values can be realized with the assistance of a plurality of model dither cells in the fashion of the model dither cells A; **and** B shown in Figure † **Figures 1A and 1B**, whereby the lowest gray scale value is defined by a single black-colored picture element, and the highest gray scale value is present when all picture

elements of the dither cell are colored black. In practice, a smaller plurality of gray scale values than the theoretically possible plurality and a correspondingly reduced plurality of model dither cells are employed, for example 16 or 32. In this example, the gray scale value then has a value range from 1 through 16 or, respectively, 1 through 32. An extreme gray scale value 0 means that none of the picture elements is colored black; in this respect, this is not a dither cell but a white, unprinted surface. Let it also be pointed out that two types of dither cell that have either 10 times 10 picture elements or 8 times 8 picture elements in a matrix arrangement dominate in practice.

Figure 2 schematically shows the division of a page S into identically sized tiles K1, K2, Ki through Kn of a two-dimensional grid network GN. Each tile K contains a plurality of image raster data in data lines of equal length. Within a tile row K1 through Ki, the tiles are processed from left to right in the search algorithm that shall be subsequently described; the tile rows [sic] are processed from top to bottom. However, some other processing sequence is also conceivable.

Figure 3 schematically shows the procedure for determining dither cells that are contained in a tile Ka. First, comparison rows Vz1, Vz2, Vz3; and Vz4 are offered that have at least the same row length as the tiles K1 through Kn. For greater clarity, only four comparison rows Vz1 through Vz4 are employed. In practice, just as many comparison rows are offered as there are gray scale values defined by the model dither cells. Each comparison row Vz1 through Vz4 contains identical model dither cells with a specific gray scale value. The comparison row Vz1 contains model dither cells with a gray scale value G=1, the comparison row Vz2 contains model dither cells with a gray scale value G=2, the comparison

row Vz3 contains model dither cells with a gray scale value $G=3$, and the comparison row Vz4 contains model dither cells with a gray scale value $G=4$. Comparison row Vz1 thus contains the fewest black-colored picture elements. The comparison row Vz2 with the next higher gray scale value $G=2$ contains black-colored picture elements of the model dither cell with the gray scale value $G=1$ at the same raster positions and additional black-colored picture elements. The model dither cells of the comparison row Vz3 having the next-higher gray scale value $G=3$ contains the black-colored picture elements of the model dither cells of the comparison rows Vz1 and Vz2 at the same positions as well as additional black-colored picture elements. The similar case applies to the model dither cells of the comparison row Vz4.

Due to the overlap of the inked picture elements of the model dither cells of the comparison row Vz1 through Vz4, it suffices for locating dither cells in the various tiles when a coincidence of the first row of each and every tile K with the comparison row Vz1 is merely found in the first search step, as schematically shown in Figure 3 on the basis of the tile Ka. Tiles such as, for example, the tile K1 that already do not coincide with the comparison row Vz1 in their first row are no longer taken into consideration in the rest of the process. Such tiles are assigned the extreme gray scale value $G=0$, i.e. they do not generally contain dither cells in the first row that coincide with the model dither cell having the gray scale value $G=1$. The search for tiles within a page that have dither cells with at least the gray scale value $G=1$ thus ensues very fast when the tile size is selected appropriately large. It can already be seen here that the method of the invention works very fast due to the division according to tiles.

Figure 4 schematically shows the next step, whereby what actual gray scale value G the first row $z1$ of the tile Ka is determined within the tile Ka by comparison to the comparison rows $Vz1$ through $Vz4$. In the present case, it is found that there is coincidence between comparison row $Vz3$ and the first row $z1$ of the tile Ka , i.e. the gray scale value is $G=3$.

Figure 5 schematically shows the next step wherein a finding is made within the tile Ka as to whether at least all rows $z1$ through $z5$ with dither cells contains the gray scale value $G=3$ that had been found in the preceding step (Figure 4). In the present case, all rows $z1$ through $z5$ of the tile Ka contains at least the gray sale value $G=3$ in conformity with the comparison row $Vz3$. Two rows $z2$ and $z3$ have a higher gray scale value $G>3$, i.e. are darker. This is allowed since model dither cells with a higher gray scale value have colored the same picture elements black as model dither cells with a lower gray scale value. When, however, the gray scale value G is lower than found in the first row $z1$, then a branch is made to the next step, which is schematically shown in Figure 6.

It is shown in Figure 6 that the row $z3$ coincides with the comparison row $Vz1$, i.e. has the lowest gray scale value $G=1$. In this case, the entire tile Ka has the gray scale value $G=1$ allocated to it since this gray scale value G is at least also contained in all other rows $z1$ through $z5$ of the tile Ka . If, however, a gray scale value were found in a row that does not coincide with a model dither cell, for example the extreme gray scale value $G=0$ (which means that no comparison row fits), then the value $G=0$ is assigned to this tile and it is no longer taken into consideration in the continuing process.

It is to be pointed out that the comparison rows $Vz1$ through $Vz4$ that have dither cells

arranged in them in row form in turn contain picture element rows. In practice, the comparison of the comparison rows Vz1 through Vz4 to dither cells of the tile Ka is implemented on the basis of such picture element rows. Instead of comparison rows Vz1 through Vz4, comparison tiles can also be employed whose size corresponds to the tile Ka and that contain a plurality of rows of dither cells.

Figure 7 schematically shows a part of a page with tiles K to which gray scale values $G=0, 1, 2$ or 3 have been assigned. This assigning of gray scale values corresponds to a marking. The value $G=0$ means that no standard gray scale value was capable of being found for this tile, for example because such a tile does not generally contain dither cells with the lowest gray scale value (gray scale value $G=1$).

The tiles shown in Figure 7 are investigated tile row by tile row from left to right. Tiles having the value $G=0$ are not taken into consideration. Tiles lying next to one another having the same value, in this case the gray scale value $G=3$, are combined to form a rectangle Ra. In this way, larger areas of the page S having the same gray picture elements are combined.

Another modification in the search for rectangles provides that tiles that contain the same gray scale value (for example, gray scale value $G=1$) or a higher gray scale value (for example, gray scale value $G=2$ or $G=3$) are combined to form rectangles. The rectangle Rb shows the combination of 6 tiles that contain the gray scale values $G=1$ or $G=2$. Such a combination is expedient since dither cells with gray scale value $G=2$ have black-colored picture elements at the same positions as dither cells with gray scale value $G=1$, as already explained above. Overall, the gray scale value $G=1$ is assigned to the rectangle Rb, i.e. the

lowest gray scale value G within the rectangle R_b . An excess of black-colored picture elements thus remains for the tiles with gray scale value $G=2$. This excess derives when dither cells with gray scale value $G=1$ are subtracted from all dither cells of the rectangle R_b in a subtraction step. These excess picture elements are compressed as image raster data according to the traditional standard compression method and are transmitted.

Figure 8 shows the further treatment of the rectangle R_a within the image raster data of a page S . The position of the upper left corner of the rectangle R_a is identified as characteristic data for the rectangle R_a . Further, the height and width as well as the gray scale value G , the gray scale value $G=3$ in this case, are identified. These characteristic data are entered into a list of rectangles that lists further rectangles of the type of rectangle R_a . Subsequently, the rectangle R_a within the page S is cleaned, i.e. the value $G=0$ is assigned to the tiles of the rectangle R_a , so that these tiles are no longer taken into consideration in the search for further rectangles. The analysis of the page S has been ended, when the entire page S has been searched for tiles that can be combined to form rectangles and the characteristic data of the rectangles have been entered into the list.

The list of rectangles can be sorted in a next step. Rectangles having a decreasing plurality number of tiles are given a decreasing rank in the list. Only those rectangles whose plurality number of tiles exceeds a predetermined value are then selected from this list and their characteristic data separately transmitted. In this way, only gray picture elements that are contained in large-area rectangles are separately transmitted. The efficiency of the compression method is further enhanced as a result thereof. A decision to discard a rectangle can already be made during the process of forming rectangles in this case and, thus, the

discarded tiles can be made available in the formation of other rectangles. The efficiency of the compression method is further enhanced as a result thereof.

Another modification can be comprised therein that the plurality number of rectangles of the list is limited to a predetermined value. Since the transmission of the characteristic data of rectangles means an additional compression outlay and this outlay increases given a great number of rectangles, it is expedient to limit this plurality number.

Figure 9 shows a further modification of the formation of rectangles whose boundaries need not coincide with tile boundaries. When, as shown in Figure 7, tiles have been combined to form rectangles, then the boundaries of these rectangles coincide with tile boundaries. When, however, dither cells with the same gray scale value as those within a rectangle adjoin such a rectangle in terms of row or column and have the same minimum gray scale value G as the dither cells of the rectangle, then these dither cells can be co-incorporated into the rectangle. The height and width of the respective rectangle must then be correspondingly increased. The boundaries of the rectangles are thus enlarged to the same extent as the identical gray raster actually occurs as a rectangle in the original of a page S. The efficiency of the inventive compression method is further enhanced in this way.

Figure 9 shows three rectangles Rc, Rd, Re with solid bold-face lines. The rectangles Rc and Re have a gray scale value G=2. The rectangle Rd has a gray scale value G=4. Dither cells whose gray scale values G agree with those of the respective rectangles adjoin the rectangles Rc, Rd, Re. The individual rectangles Rc, Rd, and Re can be correspondingly enlarged in their respective height and length. Over and above this, it is possible to combine all enlarged rectangles to form a single rectangle Rf. This rectangle Rf then has the minimum

gray scale value of all enlarged rectangles Rc, Rd, and Re, namely the gray scale value $G=2$.

In Figure 9, Rd is a sub-rectangle with $G=4$ within the overall rectangle Rf with $G=2$. The overall gray scale value is $G=2$, this being transmitted as characteristic datum for the rectangle Rf. It is also possible to employ an inverse presentation for which the gray scale value $G=4$ is transmitted as a characteristic datum for the rectangle Rf. During further processing of the image data, the reduced gray scale value $G=2$ is then to be taken into consideration for the further rectangles Rc and Re.

Figure 10 shows another modification wherein the size of the dither cells and the row length as well as the column length of a tile are taken into consideration. Usually, dither cells have and an 8x8 or a 10x10 picture element matrix. The bit width of the registers of the computer hardware employed for realizing the inventive method is preferably suited as row length for a tile. Row lengths of 8, 16, 32, 64 or 128 are customary. An additive combination of ~~said~~ the row lengths is likewise possible, for example an overall row length composed of the combination of 8 bits + 32 bits = 40 bits, etc. Since the row length of the dither cells need not coincide with the row length of the tiles, it is expedient that the aforementioned comparison rows Vz1 through Vz4 ~~has~~ have a length corresponding to the smallest common multiple of the row length of the tiles and the row length of the dither cells D. In the example of Figure 10, the dither cells D have a row and column length of 10. The tiles, for example the tile K1, ~~has~~ have a row and column length of 32 bits, i.e. the tile K1 -- in terms of length and width -- comprises 3 dither cells as well as 2 columns or, respectively, rows of the next, adjacent dither cells. The smallest common multiple of row length of the tile K1 and row length of the dither cell D amounts to 160 bits. It is therefore expedient to

equip the comparison rows Vz1 through Vz4 with a row length of 160 bits. Given a register width of 32 bits, a comparison within a tile row of 5 tiles, i.e. 16 dither cells, can be simultaneously implemented in this case with the assistance of 5 double word operations. Such double word operations can be executed very fast with the assistance of registers.

5 Figure 11 shows the principle of the invention employed for compressing and transmitting the image raster data. The image raster data ~~PD~~^[sic] BD of a page S generated by the RIP module are analyzed according to the aforementioned method steps and rectangles R1; and R2 with identical dither cells are thereby identified. These two rectangles R1; and R2 on the page S are blanked out from the overall image raster data BD, for example with a subtraction method. The remaining image raster data E are transmitted according to a traditional standard compression method, for example according to the FAX G4 compression method. However, other compression methods are conceivable, for example those that work according to the run length encoding method. The characteristic data of the rectangles R1; and R2 are separately transmitted, whereby a list L of rectangles is preferably employed and only these list data are transmitted. At the receiver side, the data that have been transmitted according to the standard compression method as well as the image raster data BD of the rectangles R1; and R2 are re-compiled. In this way, not all image raster data BD of the page S need be compressed according to the standard compression method and transmitted, but only the data E, i.e. with the exception of the rectangles R1; and R2. It is to be pointed out that not all gray picture elements with identical dither cells need be combined to form rectangles. For an improved reduction of the data stream to be transmitted and of the processing time in the compression, it suffices when approximately 80 to 90% of all identical

15

20

dither cells are covered.

Figure 12 shows a block diagram of a schematic illustration of the inventive method or, respectively, of the inventive system. In a computer 10, an RIP module RIP generates image raster data from language elements of the printer language POSTSCRIPT PS that are investigated in the computer 10 with a corresponding computer program according to the above-described analysis steps, these corresponding to a filter function in a raster filter. Using a diskette 11, the computer program can have been loaded into the computer 10 on a permanent storage (hard disk) or into a volatile main memory (RAM). The image raster data that still remain per printed page after subtraction of the identified rectangles are compressed in the computer 10 according to the FAX G4 compression method and are packed according to the data formats IOCA and/or SPDS. The data format IOCA is described in the IOCA reference manual, "Image Object Content Architecture" Reference, 4th Edition (August 1993) SC31-6805-03, International Business Machines Corporation. The data format SPDS is described in the SPDS reference manual "SPDS", Edition of 11.94, U 9737-J-Z247-3, Océ Printing Systems GmbH. Both documents are herewith incorporated by reference into the disclosure of the present application.

The data with a high packing density are stored in a datafile Da in a volatile or permanent memory, particularly in the computer. The list of rectangles determined in the filtering steps is packed with high packing density according to the data format SPDS and is likewise stored in the datafile Da. The generation of the compressed data can be accelerated with the assistance of said the filter function, i.e. an abbreviated time is needed for the editing of the data. The printer accesses the datafile Da, whereby the data volume to be transmitted

to the printer is small due to the high packing density and the high informational content. An adequately great quantity of data can thus be transmitted with a given data transmission rate. This means that the printer, as a high-performance printer with a high printing output, is adequately supplied with image raster data even given printed pages with many identical, gray picture areas and can print interruption-free at a high printing speed. The printer likewise contains a computer or a controller with a decompression program with the assistance of the data of the datafile Da are converted into further-processable print data. Preferably, the decompression program contains an OR function with which the image raster data of the rectangles and the image raster data that are transmitted in a traditional way are combined to form common image raster data.

Figure 13 shows the structure of a traditional system. The image raster data of the RIP module are compressed exclusively according to a standard compression method, for example the FAX G4 compression method and are then stored in a datafile Da as data with a high packing density, being stored with the assistance of the IOCA and/or SPDS data format. Since many data arise for each identical gray picture element, the memory requirement for the datafile Da is very high. Likewise, the compression algorithms for compressing the corresponding image raster data for identical gray picture elements are extensive and time-consuming. During printing, the printer accesses the data in the datafile Da. Since a considerable data volume is to be processed but the data transmission rate from the datafile Da to the printer is limited, it can occur that the printer can print faster than data can be offered via the datafile Da. A brief stoppage of the printing event occurs in this case. Such a start-stop operation, however, is extremely disruptive for a high-performance printer; it

performance capability is only inadequately used. Typically, such a high-performance printer has a printing output greater than 400 pages DIN A4 per minute given a resolution of 600 dpi (dots per inch).

Using a flowchart, Figure 14 schematically shows method steps as were already explained in Figures 3 through 6. These method steps serve the purpose of determining a gray scale value $G=0$ or a higher gray scale value G for a tile K . As mentioned, a gray scale value $G=0$ is assigned when a row z of a tile K contains no gray picture element, i.e. no dither cell. Figure 14 only shows critical steps that serve the purpose of explaining the fundamentals of the method. Required intermediate steps, for example the definition of initial conditions for run variables, the modification of run variables, etc., ~~is~~ are familiar to a person skilled in the art active in this field.

After the start (step S1), a check is carried out in step S2 whether all tiles K of a page have already been processed. When this applies, then the entire step sequence for a page is ended in step S3. When all tiles K have not yet been processed, then a check is carried out in the following step S4 whether the appertaining tile K has its first row $z1$ coinciding with the comparison row $Vz1$ that, as mentioned, has the lowest gray scale value $G=1$. When no coincidence is found, then the extreme gray scale value $G=0$ is assigned to this tile K in step S5 and a branch is made to step S6. In this step S6, the tile run variable k is incremented by 1 and a branch is made to step S2.

When it is found in step S4 that the first row $z1$ coincides at least with the comparison line $Vz1$, then a determination is made in the next step S7 as to whether there are comparison rows $Vz2$, $Vz3$, and $Vz4$ with a higher gray scale value G that coincide with the first row $z1$.

The comparison row V_{zi} (i is a run variable) with the highest gray scale value G is then further-employed. The following step S8 is explained later. In the step S9 following thereupon, a determination is made for every row z_j (wherein j is a run variable for the row number) of the same tile K as to whether it coincides with the comparison row V_{zi} found in step S7. When this does not apply, then the run variable i is lowered by 1 in step S10, i.e. a comparison row V_{zi} with the next-lower gray scale value G is employed for the further analysis. Whether the extreme gray scale value $G=0$ is reached is then found in step S8. When this applies, then a branch is made to step S6 and the next tile K is analyzed. The gray scale value $G=0$ means that a white picture element to which no gray scale value can be assigned occurs within the tile K .

In step S11, the gray scale value G for the appertaining tile K is then determined. This gray scale value G states that dither cells of at least this gray scale value G are present in all rows z_j of this tile. A higher gray scale value G is possible.

List of Reference Characters

~~10~~ computer

~~11~~ diskette

~~A,B~~ model dither cells

~~K,K1,K2,Ki,Kn,Ka~~ tiles

~~GN~~ grid network

~~S~~ page

~~Vz1,Vz2,Vz3,Vz4~~ comparison rows

~~G~~ gray scale value

z1 through z5 row of a tile

Ra,Rb,Rc,Rd,Re,

Rf,R1,R2 rectangles with tiles

D dither cell

5 BD image raster data

L list

Da datafile

S1 through S11 method steps Although other modifications and changes may be suggested by those skilled in the art, it is the intention of the inventors to embody within the patent warranted hereon all changes and modifications as reasonably and properly come within the scope of their contribution to the art.

----- REVISION LIST -----

The bracketed numbers refer to the Page and Paragraph for the **start** of the paragraph in both the **old** and the **new** documents.

[1:1 1:1] Add Paras "SPECIFICATION

TITLE"

[1:1 1:3] Changed "METHOD," to ""METHOD,"

[1:2 1:4] Changed "The invention relates" to ""

[1:2 1:5] Add Paras "BACKGROUND OF THE ... of the Invention"

[1:2 1:7] Changed "The invention relates" to "The present invention relates"

[1:2 1:7] Changed "said " to "the "

[1:3 1:8] Add Para "Description of the Related Art"

[1:3 1:9] Changed "increasingly employed" to "increasingly being employed"

15 [1:3 1:9] Changed "these " to "the data "

[1:3 1:9] Changed "Let an " to "The following "

[1:3 1:9] Changed "make " to "makes "

[1:4 2:1] Changed "Said document ... application " to "The PCT Application ...
incorporated hereby "

	[2:1 2:2] Changed	"density but" to "density, but"
	[2:1 2:2] Changed	"elements; only" to "elements; of which only"
	[2:2 3:1] Changed	"whereby dither" to "whereby a dither"
	[2:2 3:1] Changed	"as dither" to "as a dither"
5	[2:2 3:1] Changed	"Said " to "The above "
	[2:2 3:1] Changed	"to be included " to "incorporated herein "
	[2:2 3:1] Changed	"reference ... application." to "reference."
	[2:4 3:3] Changed	"-A " to "Patent No. "
	[3:2 3:4] Changed	"device [sic] " to "devices "
	[3:2 3:4] Changed	"from DE-C2-38" to "from German ... Document DE-C2-38"
	[3:2 3:4] Changed	"481-482. DE-C2-41" to "481-482. German ... Document DE-C2-41"
	[3:2 3:4] Changed	"processed. DE-C2-29" to "processed. ... Document DE-C2-29"
	[3:2 3:4] Changed	"and DE-A1-42" to "and German ... Document DE-A1-42"
15	[3:2 3:4] Changed	"devices. JP-A-11-65793" to "devices. Japanese ... JP-A-11-65793"
	[3:3 4:1] Changed	"EP" to "European Patent Document EP"
	[3:4 4:2] Changed	"-A " to "Patent No. "
	[3:5 5:1] Add Para	"SUMMARY OF THE INVENTION"
	[3:5 5:2] Changed	"specify " to "provide "
20	[3:6 5:3] Changed	"for a method ... subclaims." to "by a method ... scale value."
	[3:6 5:4] Add Paras	"A further improvement ... set-forth steps."
	[4:1 9:2] Changed	"of identical" to "of an identical"

[4:1 9:2] **Changed** "tile are compressed" to "tile is compressed"

[4:3 10:1] **Changed** "having the ... is recited" to "has comprising ... scale value"

[4:4 11:1] **Changed** "having the ... is recited" to "is provided ... scale value"

[4:4 11:1] **Changed** "agrees [sic] " to "agree "

5 [4:5 11:2] **Changed** "recited according ... respectively, 38" to "provided"

[4:5 11:2] **Changed** "as software" to "as a software"

[4:5 11:2] **Changed** "as computer-readable" to "as a computer-readable"

[4:5 12:1] **Add Para** "BRIEF DESCRIPTION OF THE DRAWINGS"

[5:1 12:3] **Changed** "drawings. ... therein are:" to ""

[5:2 12:3] **Changed** "Figure 1 " to "Figures 1A ... illustrations of "

[5:2 12:3] **Changed** ";" to "."

[5:3 12:4] **Changed** "2 the" to "2 is a diagram showing the"

[5:3 12:4] **Changed** "network;" to "network"

[5:4 12:5] **Changed** "3 a" to "3 is a schematic illustration of a"

15 [5:4 12:5] **Changed** ";" to "."

[5:6 12:6] **Changed** "6 a" to "6 are schematic illustrations of a"

[5:6 12:6] **Changed** ";" to "."

[5:7 12:7] **Changed** "7 the" to "7 is an illustration of the"

[5:7 12:7] **Changed** ";" to "."

20 [5:8 12:8] **Changed** "8 the" to "8 is an illustration of the"

[5:8 12:8] **Changed** ";" to "."

[5:9 12:9] **Changed** "9 an" to "9 is a schematic showing of an"

[5:9 12:9] Changed ";" to "."

[5:10 12:10] Changed "10 the" to "10 is a schematic showing of the"

[5:10 12:10] Changed ";" to "."

[5:11 12:11] Changed "11 the" to "11 is a flow diagram of the"

5 [5:11 12:11] Changed ";" to "."

[5:12 12:12] Changed "12 a" to "12 is a"

[5:12 12:12] Changed "; and" to "."

[5:13 13:1] Changed "13 a" to "13 is a block diagram of a"

[5:13 13:1] Changed "; and" to "."

[5:14 13:2] Changed "14 a" to "14 is a"

[5:15 13:3] Add Para "DETAILED DESCRIPTION ... PREFERRED
EMBODIMENTS"

[5:15 13:4] Changed "Figure shows " to "Figures 1A and 1B show "

[5:15 13:4] Changed "A, B" to "A and B"

15 [5:15 13:4] Changed "Generally valid " to "It is generally true "

[5:15 13:4] Changed "cells is that" to "cells that"

[5:15 13:4] Changed "Figure 1," to "Figure 1A,"

[5:15 13:4] Changed "cell B. In" to "cell B in Figure 1B. In"

[6:1 14:1] Changed "A, B" to "A and B"

20 [6:1 14:1] Changed "Figure 1" to "Figures 1A and 1B"

[7:1 14:2] Changed "rows [sic] are" to "rows are"

[7:2 14:3] Changed "Vz3, Vz4" to "Vz3 and Vz4"

[7:2 14:3] Changed "by model" to "by the model"

[10:2 18:2] Changed "decreasing plurality of" to "decreasing number of"

[10:2 18:2] Changed "whose plurality of" to "whose number of"

[10:3 19:1] Changed "plurality " to "number "

5 [10:3 19:1] Changed "this plurality." to "this number."

[11:1 19:3] Changed "Rc, Rd, Re can" to "Rc, Rd and Re can"

[11:1 19:3] Changed "Rd, Re," to "Rd and Re,"

[11:1 19:3] Changed "is transmitted ... datum for" to "is transmitted ... datum for"

[11:2 20:1] Changed "have and 8x8" to "have an 8x8"

[11:2 20:1] Changed "said " to "the "

[11:2 20:1] Changed "Vz4 has [sic] a" to "Vz4 have a"

[11:2 20:1] Changed "K1, has [sic] a" to "K1, have a"

[12:1 21:1] Changed "PD [sic] " to "BD "

[12:1 21:1] Changed "rectangles R1, R2 with" to "rectangles R1 and R2 with"

15 [12:1 21:1] Changed "rectangles R1, R2 on" to "rectangles R1 and R2 on"

[12:1 21:1] Changed "the rectangles ... separately" to "the rectangles ... separately"

[12:1 21:1] Changed "the rectangles ... re-compiled." to "the rectangles ... re-compiled."

[12:1 21:1] Changed "R1, R2." to "R1 and R2."

[13:2 22:2] Changed "said " to "the "


20 [14:2 24:1] Changed "is [sic] " to "are "

[15:2 25:1] Changed "Vz3, Vz4" to "Vz3 and Vz4"

[16:1 25:3] Del Paras "List of Reference ... S11 method steps"

[16:17 25:3] Add Para



"Although other ... contribution to the art."

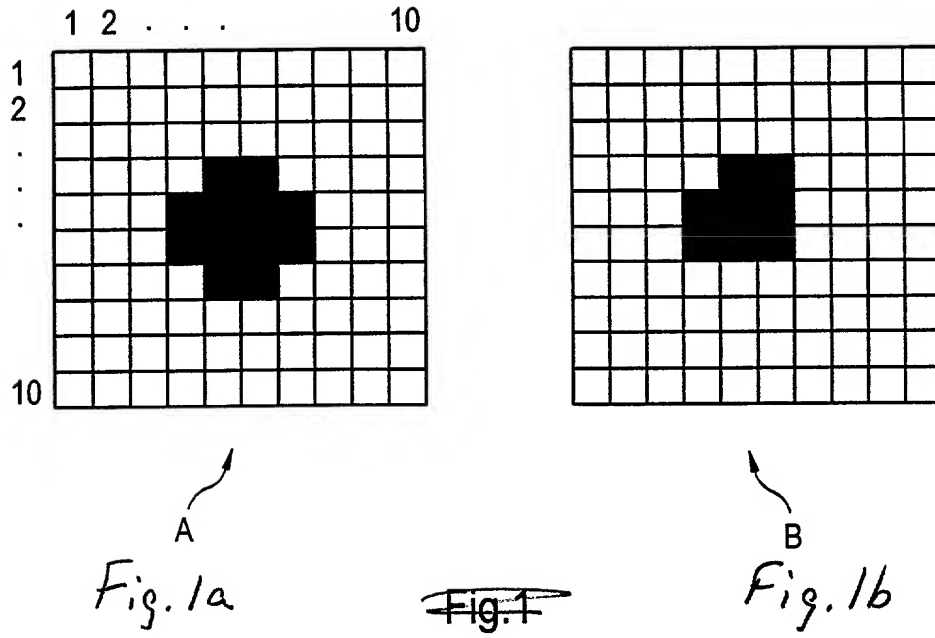

	K1	K2		Ki
GN				
GN				
				Kn

S

Fig. 2

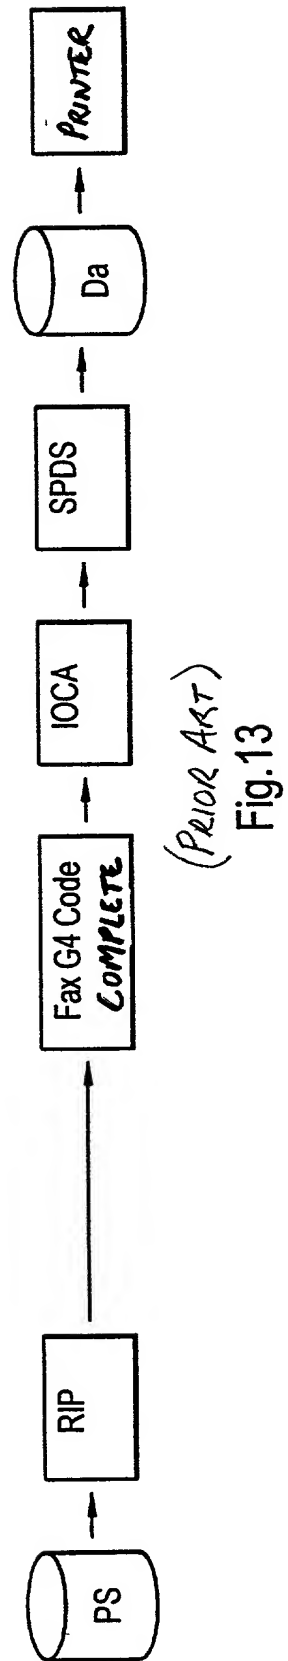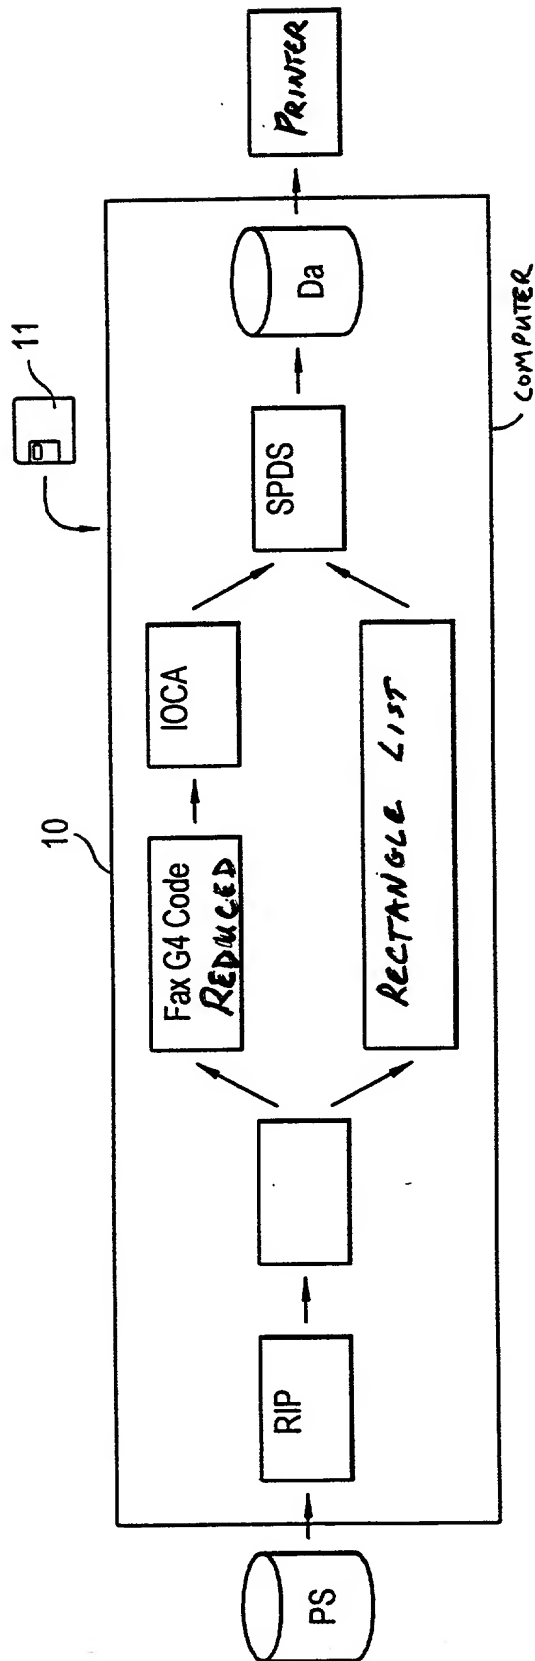

METHOD, SYSTEM AND COMPUTER PROGRAM FOR COMPRESSING AND TRANSMITTING IMAGE RASTER DATA

The invention relates to a method for compressing and transmitting image raster data, whereby a data stream of image raster data is generated page-by-page from language elements of a graphics language, said data stream containing gray image areas in the form of dither cells whose gray scale values are determined by model dither cells. The invention also relates to a system for compressing and transmitting image raster data upon employment of the aforementioned method. The invention also relates to a computer system with whose assistance a computer can implement the method.

It is not only black/white structures but also gray image areas that have a prescribed gray scale value that are being increasingly employed when printing text and drawings. When, for example, an RIP module generates a data stream of image raster data page-by-page from language elements of a graphics language, for example the known printer language POSTSCRIPT, a noticeably larger dataset must be processed due to the gray image areas that are produced by dithering. The RIP module (RIP = raster image processing) is generally arranged outside the printer; this means that its image raster data must be compressed in order to be able to transmit these in time-conforming fashion with a given data transmission rate. Let an example make this clear: A DIN A4 page contains approximately 4.3 megabytes of image raster data given a pixel density of 600 dpi (dots per inch). A high-performance printer has the capability of printing more than 400 DIN A4 pages per minute at 600 dpi. Accordingly, a data rate of more than 28 megabytes/s would have to be governed without compression.

Up to now, the image raster data were compressed with the assistance of a standardized compression method, for example the FAX G4 compression method, and were intermediately stored and/or directly transmitted to the printer in this compressed form. For example, International Patent Application No. PCT/DE95/01293, which claims the priority of German Patent Application No. 44 34 068.0, references compression methods in conjunction with printers. Said document

is to be included in the disclosure of this application by reference. When a printed page contains either no or only a few gray raster image areas, the compression time is relatively short and the efficiency of the compression is relatively high. When, however, a page contains a great proportion of gray raster image regions, then the compression time lengthens exponentially and the compression efficiency becomes low.

Picture elements in the form of gray rasters are often generated upon employment of the dithering method. In this dithering method, gray scales are generated by employing dot patterns (rasters). The dithering method exploits a unique property of the human eye: individual picture elements are no longer perceived beyond a specific viewer distance and a specific dot density but blur to form a gray scale value. A dither cell, accordingly, contains a plurality of picture elements; only one picture element, several picture elements or all picture elements of a dither cell are inked dependent on the desired gray scale value. In order to achieve a good melding of the picture elements, the inked picture elements are scattered according to a predetermined algorithm. The gray scale values themselves are fixed by given model dither cells. When a dither cell contains 8x8 picture elements in the form of a matrix and a symmetrical arrangement of the inked picture elements is prescribed, then 32 or 64 gray scale values can be realized. Since dither cells and the distribution of the inked picture elements are relatively complex, standard compression methods for the reduction of the data volume often fail.

Section 6 in Das Druckerbuch of Océ Printing Systems GmbH, 3rd Edition, 1998, ISBN 3-00-001019-X describes raster technique, whereby dither technique is also addressed. Among others, the dot pattern method is described as dither technique. Said document is to be included by reference in the disclosure of the present application.

The dithering method is also described in Das große Data Becker Computer Lexikon, 1997 Edition, ISBN 3-8158-1575-4, and in Computer Lexikon, Verlag C. H. Beck, Munich, ISBN 3-406-39696-8.

US-A 5,073,953 discloses a method for the automatic segmenting of documents. The picture elements of the document are analyzed according to different types, for

example black/white texts, graphics elements, continuous tone images, half-tone images, etc. The document to be analyzed is divided into sub-images and the type is assigned to these sub-images.

Image compression device [sic] are known from DE-C2-38 24 717 and
5 from the publication by W. Crocca et al., "Compression of grey digital images using grey separations", Xerox Disclosure Journal, Vol. 15, No. 6, Nov/Dec 1990, pages 481-482. DE-C2-41 27 920 discloses an image processing device wherein image data are subdivided into blocks and the blocks are sequentially processed. DE-C2-29 53 109 and DE-A1-42 15 157 disclose image reception devices. JP-A-11-65793
10 discloses a method with which data are compressed differently according to the object type (image or text). The contents of the above-cited documents are herewith likewise incorporated by reference into the present specification.

EP 0 774 858 A3 discloses a method for compressing and transmitting
image raster data wherein picture elements (pixels) are combined into macro-cells in
15 the fashion of tiles. These macro-cells are assigned to predetermined type classes, for example the type text, graphics, gray scale image, etc. The compression method to be applied is adapted dependent on the information about the type of macro-cell. For compression, the pixels of the respective tile are re-ordered (rescanning), whereby the respectively exposure value of the pixel is defined dependent on the position of the
20 pixel with reference to the center of the macro-cell.

US-A 5,465,173 is directed to an image processing method wherein half-tone image data are stored. The storing ensues block-by-block with a prescribed plurality of pixel data. A compression of the half-tone image data ensues on the basis of the block-by-block data, whereby the memory requirement is reduced.

25 An object of the invention is to specify a method and a system for compressing and transmitting image raster data that also works with high efficiency when a page to be transmitted contains gray picture elements.

This object is achieved for a method with the features of claim 1.
Advantageous developments are recited in the subclaims.

30 According to the invention, the image raster data of each and every page are divided into tiles, for example tiles of identical size, of a two-dimensional grid

network. A determination is made for every tile as to whether it exclusively contains dither cells or not. When the former applies, the appertaining model dither cell and the gray scale value thereof are determined and this tile is marked. When the tile does
5 not exclusively contain dither cells, for example non-inked white parts, then this tile is not further-analyzed. The image raster data of such a tile are compressed according to traditional compression methods. Characteristic data, for example about the size and the gray scale value, are identified from the marked tiles, and these characteristic data are transmitted as compressed data. The image raster data of such marked tiles need
10 not be compressed according to the traditional compression methods, i.e. they are bracketed out in the traditional compression method. In this way, the traditional compression method can compress a page faster and with higher efficiency since, on the one hand, the compression of marked tiles and, on the other hand, the considerable

compression outlay for dither cells are eliminated. According to the inventive method, an added outlay is in fact required overall for the analysis of the tiles and the transmission of the characteristic data of marked tiles. This added outlay, however, is slight compared to the saving in compression outlay for the standardized compression method.

According to a further aspect of the invention, a system for compressing and transmitting image raster data having the features of claim 27 is recited. This system has the technical advantages already described above in conjunction with the method.

Further, a method for compressing and transmitting image raster data having the features of claim 31 is recited. Given this method, at least one area is identified that contains only dither cells that agrees [sic] with a pre-defined model dither cell and a gray scale value. The characteristic data of this area are transmitted for further-processing of the image raster data.

According to a further aspect of the invention, a computer program product, a computer program element and a computer-readable medium are recited according to claims 35, 36 or, respectively, 38. The computer program product and the computer program element contain commands and data for the control of a computer. After the loading of the computer program product or, respectively, of the computer program element that, for example, is loaded as software module either individually or together with other software modules, the method steps defined in the claims are implemented when the commands are processed and the technical result is achieved. A diskette, a magnetic or optical storage disk (CD ROM), a data carrier tape or a remote memory can be employed as computer-readable medium, a computer program being transmitted and loaded therefrom by remote data transmission, for example via the Internet.

An exemplary embodiment of the invention is explained below on the basis of the drawings. Shown therein are:

- Figure 1 model dither cells with overlap of the inked picture elements;
- Figure 2 the division of a page into tiles with the assistance of a grid network;

- Figure 3 a search algorithm upon employment of comparison lines composed of tiles;
- Figures 4, 5 and 6 a search algorithm for fixing the gray scale value of a tile;
- 5 Figure 7 the combining of tiles to form rectangles;
- Figure 8 the deletion of a rectangle;
- Figure 9 an expansion possibility for a rectangle;
- Figure 10 the fixing of the bit length of a comparison line;
- Figure 11 the transmission of the image raster data upon employment of the inventive method;
- 10 Figure 12 a illustration of the inventive method in a block diagram; and
- Figure 13 a traditional method for compressing and transmitting image raster data according to the Prior Art; and
- Figure 14 a flowchart with method steps for allocating gray scale values to tiles.
- 15 Figure shows the structure of two model dither cells A and B. Both model dither cells A, B have 10 times 10 picture elements, i.e. the row length amounts to 10 picture elements and the column length likewise amounts to 10 picture elements. The model dither cell A contains black-colored picture elements in the middle in the fashion of a cross. The model dither cell B contains black-colored picture elements in the middle that together yield an L pointing to the left. The model dither cell B contains fewer black-colored picture elements than the model dither cell A.
- 20 Accordingly, the gray of the model dither cell B is lighter than the gray of the model dither cell A. This means that the gray scale value of the model dither cell B is lower than the gray scale value of the model dither cell A. Generally valid for the arrangement of the black-colored picture elements of model dither cells is that the model dither cell with the higher gray scale value contains inked picture elements at least at identical positions as the model dither cell with the next-lower gray scale value. This means that inked picture elements of model dither cells with a higher gray scale value overlap the inked picture elements of model dither cells with a lower gray scale value. In Figure 1, the darker model dither cell A has black-colored picture
- 25
- 30

elements at identical positions as the model dither cell B. In addition, further picture elements are colored black in the model dither cell A.

Theoretically, a plurality of gray scale values can be realized with the assistance of a plurality of model dither cells in the fashion of the model dither cells A, B shown in Figure 1, whereby the lowest gray scale value is defined by a single black-colored picture element, and the highest gray scale value is present when all picture elements of the dither cell are colored black. In practice, a smaller plurality of gray scale values than the theoretically possible plurality and a correspondingly reduced plurality of model dither cells are employed, for example 16 or 32. In this example, the gray scale value then has a value range from 1 through 16 or, respectively, 1 through 32. An extreme gray scale value 0 means that none of the picture elements is colored black; in this respect, this is not a dither cell but a white, unprinted surface. Let it also be pointed out that two types of dither cell that have either 10 times 10 picture elements or 8 times 8 picture elements in a matrix arrangement dominate in practice.

Figure 2 schematically shows the division of a page S into identically sized tiles K1, K2, Ki through Kn of a two-dimensional grid network GN. Each tile K contains a plurality of image raster data in data lines of equal length. Within a tile row K1 through Ki, the tiles are processed from left to right in the search algorithm that shall be subsequently described; the tile rows [sic] are processed from top to bottom. However, some other processing sequence is also conceivable.

Figure 3 schematically shows the procedure for determining dither cells that are contained in a tile Ka. First, comparison rows Vz1, Vz2, Vz3, Vz4 are offered that have at least the same row length as the tiles K1 through Kn. For greater clarity, only four comparison rows Vz1 through Vz4 are employed. In practice, just as many comparison rows are offered as there are gray scale values defined by model dither cells. Each comparison row Vz1 through Vz4 contains identical model dither cells with a specific gray scale value. The comparison row Vz1 contains model dither cells with a gray scale value G=1, the comparison row Vz2 contains model dither cells with a gray scale value G=2, the comparison row Vz3 contains model dither cells with a gray scale value G=3, and the comparison row Vz4 contains model dither

cells with a gray scale value $G=4$. Comparison row Vz1 thus contains the fewest black-colored picture elements. The comparison row Vz2 with the next higher gray scale value $G=2$ contains black-colored picture elements of the model dither cell with the gray scale value $G=1$ at the same raster positions and additional black-colored picture elements. The model dither cells of the comparison row Vz3 having the next-
 5 higher gray scale value $G=3$ contains the black-colored picture elements of the model dither cells of the comparison rows Vz1 and Vz2 at the same positions as well as additional black-colored picture elements. The similar case applies to the model dither cells of the comparison row Vz4.

10 Due to the overlap of the inked picture elements of the model dither cells of the comparison row Vz1 through Vz4, it suffices for locating dither cells in the various tiles when a coincidence of the first row of each and every tile K with the comparison row Vz1 is merely found in the first search step, as schematically shown in Figure 3 on the basis of the tile Ka. Tiles such as, for example, the tile K1 that
 15 already do not coincide with the comparison row Vz1 in their first row are no longer taken into consideration in the rest of the process. Such tiles are assigned the extreme gray scale value $G=0$, i.e. they do not generally contain dither cells in the first row that coincide with the model dither cell having the gray scale value $G=1$. The search for tiles within a page that have dither cells with at least the gray scale value $G=1$ thus
 20 ensues very fast when the tile size is selected appropriately large. It can already be seen here that the method of the invention works very fast due to the division according to tiles.

Figure 4 schematically shows the next step, whereby what actual gray scale value G the first row z1 of the tile Ka is determined within the tile Ka by
 25 comparison to the comparison rows Vz1 through Vz4. In the present case, it is found that there is coincidence between comparison row Vz3 and the first row z1 of the tile Ka, i.e. the gray scale value is $G=3$.

Figure 5 schematically shows the next step wherein a finding is made within the tile Ka as to whether at least all rows z1 through z5 with dither cells
 30 contains the gray scale value $G=3$ that had been found in the preceding step (Figure 4). In the present case, all rows z1 through z5 of the tile Ka contains at least the gray

sale value $G=3$ in conformity with the comparison row Vz3. Two rows z2 and z3 have a higher gray scale value $G>3$, i.e. are darker. This is allowed since model dither cells with a higher gray scale value have colored the same picture elements black as model dither cells with a lower gray scale value. When, however, the gray scale value

5 G is lower than found in the first row z1, then a branch is made to the next step, which is schematically shown in Figure 6.

It is shown in Figure 6 that the row z3 coincides with the comparison row Vz1, i.e. has the lowest gray scale value $G=1$. In this case, the entire tile Ka has the gray scale value $G=1$ allocated to it since this gray scale value G is at least also

10 contained in all other rows z1 through z5 of the tile Ka. If, however, a gray scale value were found in a row that does not coincide with a model dither cell, for example the extreme gray scale value $G=0$ (which means that no comparison row fits), then the value $G=0$ is assigned to this tile and it is no longer taken into consideration in the continuing process.

15 It is to be pointed out that the comparison rows Vz1 through Vz4 that have dither cells arranged in them in row form in turn contain picture element rows. In practice, the comparison of the comparison rows Vz1 through Vz4 to dither cells of the tile Ka is implemented on the basis of such picture element rows. Instead of comparison rows Vz1 through Vz4, comparison tiles can also be employed whose

20 size corresponds to the tile Ka and that contain a plurality of rows of dither cells.

Figure 7 schematically shows a part of a page with tiles K to which gray scale values $G=0, 1, 2$ or 3 have been assigned. This assigning of gray scale values corresponds to a marking. The value $G=0$ means that no standard gray scale value was capable of being found for this tile, for example because such a tile does not

25 generally contain dither cells with the lowest gray scale value (gray scale value $G=1$).

The tiles shown in Figure 7 are investigated tile row by tile row from left to right. Tiles having the value $G=0$ are not taken into consideration. Tiles lying next to one another having the same value, in this case the gray scale value $G=3$, are combined to form a rectangle Ra. In this way, larger areas of the page S having the

30 same gray picture elements are combined.

Another modification in the search for rectangles provides that tiles that contain the same gray scale value (for example, gray scale value $G=1$) or a higher gray scale value (for example, gray scale value $G=2$ or $G=3$) are combined to form rectangles. The rectangle Rb shows the combination of 6 tiles that contain the gray scale values $G=1$ or $G=2$. Such a combination is expedient since dither cells with gray scale value $G=2$ have black-colored picture elements at the same positions as dither cells with gray scale value $G=1$, as already explained above. Overall, the gray scale value $G=1$ is assigned to the rectangle Rb, i.e. the lowest gray scale value G within the rectangle Rb. An excess of black-colored picture elements thus remains for the tiles with gray scale value $G=2$. This excess derives when dither cells with gray scale value $G=1$ are subtracted from all dither cells of the rectangle Rb in a subtraction step. These excess picture elements are compressed as image raster data according to the traditional standard compression method and are transmitted.

Figure 8 shows the further treatment of the rectangle Ra within the image raster data of a page S. The position of the upper left corner of the rectangle Ra is identified as characteristic data for the rectangle Ra. Further, the height and width as well as the gray scale value G , the gray scale value $G=3$ in this case, are identified. These characteristic data are entered into a list of rectangles that lists further rectangles of the type of rectangle Ra. Subsequently, the rectangle Ra within the page S is cleaned, i.e. the value $G=0$ is assigned to the tiles of the rectangle Ra, so that these tiles are no longer taken into consideration in the search for further rectangles. The analysis of the page S has been ended, when the entire page S has been searched for tiles that can be combined to form rectangles and the characteristic data of the rectangles have been entered into the list.

The list of rectangles can be sorted in a next step. Rectangles having a decreasing plurality of tiles are given a decreasing rank in the list. Only those rectangles whose plurality of tiles exceeds a predetermined value are then selected from this list and their characteristic data separately transmitted. In this way, only gray picture elements that are contained in large-area rectangles are separately transmitted. The efficiency of the compression method is further enhanced as a result thereof. A decision to discard a rectangle can already be made during the process of

forming rectangles in this case and, thus, the discarded tiles can be made available in the formation of other rectangles. The efficiency of the compression method is further enhanced as a result thereof.

Another modification can be comprised therein that the plurality of rectangles of the list is limited to a predetermined value. Since the transmission of the characteristic data of rectangles means an additional compression outlay and this outlay increases given a great number of rectangles, it is expedient to limit this plurality.

Figure 9 shows a further modification of the formation of rectangles whose boundaries need not coincide with tile boundaries. When, as shown in Figure 7, tiles have been combined to form rectangles, then the boundaries of these rectangles coincide with tile boundaries. When, however, dither cells with the same gray scale value as those within a rectangle adjoin such a rectangle in terms of row or column and have the same minimum gray scale value G as the dither cells of the rectangle, then these dither cells can be co-incorporated into the rectangle. The height and width of the respective rectangle must then be correspondingly increased. The boundaries of the rectangles are thus enlarged to the same extent as the identical gray raster actually occurs as a rectangle in the original of a page S . The efficiency of the inventive compression method is further enhanced in this way.

Figure 9 shows three rectangles R_c , R_d , R_e with solid bold-face lines. The rectangles R_c and R_e have a gray scale value $G=2$. The rectangle R_d has a gray scale value $G=4$. Dither cells whose gray scale values G agree with those of the respective rectangles adjoin the rectangles R_c , R_d , R_e . The individual rectangles R_c , R_d , R_e can be correspondingly enlarged in their respective height and length. Over and above this, it is possible to combine all enlarged rectangles to form a single rectangle R_f . This rectangle R_f then has the minimum gray scale value of all enlarged rectangles R_c , R_d , R_e , namely the gray scale value $G=2$. In Figure 9, R_d is a sub-rectangle with $G=4$ within the overall rectangle R_f with $G=2$. The overall gray scale value is $G=2$, this being transmitted as characteristic datum for the rectangle R_f . It is also possible to employ an inverse presentation for which the gray scale value $G=4$ is transmitted as characteristic datum for the rectangle R_f . During further processing of

the image data, the reduced gray scale value $G=2$ is then to be taken into consideration for the further rectangles R_c and R_e .

Figure 10 shows another modification wherein the size of the dither cells and the row length as well as the column length of a tile are taken into consideration.

5 Usually, dither cells have an 8×8 or a 10×10 picture element matrix. The bit width of the registers of the computer hardware employed for realizing the inventive method is preferably suited as row length for a tile. Row lengths of 8, 16, 32, 64 or 128 are customary. An additive combination of said row lengths is likewise possible, for example an overall row length composed of the combination of 8 bits + 32 bits = 40

10 bits, etc. Since the row length of the dither cells need not coincide with the row length of the tiles, it is expedient that the aforementioned comparison rows $Vz1$ through $Vz4$ has [sic] a length corresponding to the smallest common multiple of the row length of the tiles and the row length of the dither cells D . In the example of Figure 10, the dither cells D have a row and column length of 10. The tiles, for

15 example the tile $K1$, has [sic] a row and column length of 32 bits, i.e. the tile $K1$ -- in terms of length and width -- comprises 3 dither cells as well as 2 columns or, respectively, rows of the next, adjacent dither cells. The smallest common multiple of row length of the tile $K1$ and row length of the dither cell D amounts to 160 bits. It is therefore expedient to equip the comparison rows $Vz1$ through $Vz4$ with a row length

20 of 160 bits. Given a register width of 32 bits, a comparison within a tile row of 5 tiles, i.e. 16 dither cells, can be simultaneously implemented in this case with the assistance of 5 double word operations. Such double word operations can be executed very fast with the assistance of registers.

Figure 11 shows the principle of the invention employed for compressing

25 and transmitting the image raster data. The image raster data PD [sic] of a page S generated by the RIP module are analyzed according to the aforementioned method steps and rectangles $R1$, $R2$ with identical dither cells are thereby identified. These two rectangles $R1$, $R2$ on the page S are blanked out from the overall image raster data BD , for example with a subtraction method. The remaining image raster data E

30 are transmitted according to a traditional standard compression method, for example according to the FAX G4 compression method. However, other compression

methods are conceivable, for example those that work according to the run length encoding method. The characteristic data of the rectangles R1, R2 are separately transmitted, whereby a list L of rectangles is preferably employed and only these list data are transmitted. At the receiver side, the data that have been transmitted

5 according to the standard compression method as well as the image raster data BD of the rectangles R1, R2 are re-compiled. In this way, not all image raster data BD of the page S need be compressed according to the standard compression method and transmitted, but only the data E, i.e. with the exception of the rectangles R1, R2. It is to be pointed out that not all gray picture elements with identical dither cells need be

10 combined to form rectangles. For an improved reduction of the data stream to be transmitted and of the processing time in the compression, it suffices when approximately 80 to 90% of all identical dither cells are covered.

Figure 12 shows a block diagram of a schematic illustration of the inventive method or, respectively, of the inventive system. In a computer 10, an RIP

15 module RIP generates image raster data from language elements of the printer language POSTSCRIPT PS that are investigated in the computer 10 with a corresponding computer program according to the above-described analysis steps, these corresponding to a filter function in a raster filter. Using a diskette 11, the computer program can have been loaded into the computer 10 on a permanent storage

20 (hard disk) or into a volatile main memory (RAM). The image raster data that still remain per printed page after subtraction of the identified rectangles are compressed in the computer 10 according to the FAX G4 compression method and are packed according to the data formats IOCA and/or SPDS. The data format IOCA is described in the IOCA reference manual, "Image Object Content Architecture"

25 Reference, 4th Edition (August 1993) SC31-6805-03, International Business Machines Corporation. The data format SPDS is described in the SPDS reference manual "SPDS", Edition of 11.94, U 9737-J-Z247-3, Océ Printing Systems GmbH. Both documents are herewith incorporated by reference into the disclosure of the present application.

30 The data with a high packing density are stored in a datafile Da in a volatile or permanent memory, particularly in the computer. The list of rectangles

determined in the filtering steps is packed with high packing density according to the data format SPDS and is likewise stored in the datafile Da. The generation of the compressed data can be accelerated with the assistance of said filter function, i.e. an abbreviated time is needed for the editing of the data. The printer accesses the datafile Da, whereby the data volume to be transmitted to the printer is small due to the high packing density and the high informational content. An adequately great quantity of data can thus be transmitted with a given data transmission rate. This means that the printer, as a high-performance printer with a high printing output, is adequately supplied with image raster data even given printed pages with many identical, gray picture areas and can print interruption-free at a high printing speed. The printer likewise contains a computer or a controller with a decompression program with the assistance of the data of the datafile Da are converted into further-processable print data. Preferably, the decompression program contains an OR function with which the image raster data of the rectangles and the image raster data that are transmitted in a traditional way are combined to form common image raster data.

Figure 13 shows the structure of a traditional system. The image raster data of the RIP module are compressed exclusively according to a standard compression method, for example the FAX G4 compression method and are then stored in a datafile Da as data with a high packing density, being stored with the assistance of the IOCA and/or SPDS data format. Since many data arise for each identical gray picture element, the memory requirement for the datafile Da is very high. Likewise, the compression algorithms for compressing the corresponding image raster data for identical gray picture elements are extensive and time-consuming. During printing, the printer accesses the data in the datafile Da. Since a considerable data volume is to be processed but the data transmission rate from the datafile Da to the printer is limited, it can occur that the printer can print faster than data can be offered via the datafile Da. A brief stoppage of the printing event occurs in this case. Such a start-stop operation, however, is extremely disruptive for a high-performance printer; its performance capability is only inadequately used. Typically, such a high-

performance printer has a printing output greater than 400 pages DIN A4 per minute given a resolution of 600 dpi (dots per inch).

Using a flowchart, Figure 14 schematically shows method steps as were already explained in Figures 3 through 6. These method steps serve the purpose of
 5 determining a gray scale value $G=0$ or a higher gray scale value G for a tile K . As mentioned, a gray scale value $G=0$ is assigned when a row z of a tile K contains no gray picture element, i.e. no dither cell. Figure 14 only shows critical steps that serve the purpose of explaining the fundamentals of the method. Required intermediate steps, for example the definition of initial conditions for run variables, the
 10 modification of run variables, etc., is [sic] familiar to a person skilled in the art active in this field.

After the start (step S1), a check is carried out in step S2 whether all tiles K of a page have already been processed. When this applies, then the entire step sequence for a page is ended in step S3. When all tiles K have not yet been
 15 processed, then a check is carried out in the following step S4 whether the appertaining tile K has its first row $z1$ coinciding with the comparison row $Vz1$ that, as mentioned, has the lowest gray scale value $G=1$. When no coincidence is found, then the extreme gray scale value $G=0$ is assigned to this tile K in step S5 and a branch is made to step S6. In this step S6, the tile run variable k is incremented by 1
 20 and a branch is made to step S2.

When it is found in step S4 that the first row $z1$ coincides at least with the comparison line $Vz1$, then a determination is made in the next step S7 as to whether there are comparison rows $Vz2$, $Vz3$, $Vz4$ with a higher gray scale value G that coincide with the first row $z1$. The comparison row Vzi (i is a run variable) with the
 25 highest gray scale value G is then further-employed. The following step S8 is explained later. In the step S9 following thereupon, a determination is made for every row zj (wherein j is a run variable for the row number) of the same tile K as to whether it coincides with the comparison row Vzi found in step S7. When this does not apply, then the run variable i is lowered by 1 in step S10, i.e. a comparison row
 30 Vzi with the next-lower gray scale value G is employed for the further analysis. Whether the extreme gray scale value $G=0$ is reached is then found in step S8. When

this applies, then a branch is made to step S6 and the next tile K is analyzed. The gray scale value $G=0$ means that a white picture element to which no gray scale value can be assigned occurs within the tile K.

In step S11, the gray scale value G for the appertaining tile K is then
 5 determined. This gray scale value G states that dither cells of at least this gray scale value G are present in all rows z_j of this tile. A higher gray scale value G is possible.

11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211

List of Reference Characters

	10	computer
	11	diskette
	A,B	model dither cells
5	K,K1,K2,Ki,Kn,Ka	tiles
	GN	grid network
	S	page
	Vz1,Vz2,Vz3,Vz4	comparison rows
	G	gray scale value
10	z1 through z5	row of a tile
	Ra,Rb,Rc,Rd,Re,	
	Rf,R1,R2	rectangles with tiles
	D	dither cell
	BD	image raster data
15	L	list
	Da	datafile
	S1 through S11	method steps

Claims

1. Method for compressing and transmitting image raster data,
whereby a data stream of image raster data is generated from language elements of a
graphics language, said data stream containing gray image areas in the form of dither
5 cells whose gray scale values (G) are determined by model dither cells (A,B),
the image raster data of each and every page (S) are divided into tiles (K) of a two-
dimensional grid network (GN), whereby each tile (K) comprises a plurality of image
raster data,
characterized in that the appertaining model dither cell and the gray scale value (G)
10 thereof is identified for each tile (K) that contains only dither cells, and this tile (K) is
marked,
and in that characteristic data of the marked tiles (K) are transmitted for further
processing of the image raster data, whereby these characteristic data contain
information about the position of the respective tile (K) and the respective gray scale
15 value (G).
2. Method according to claim 1, characterized in that the dither cells
contain rectangularly or quadratically arranged picture elements; and in that the model
dither cell (A) with higher gray scale value (G) at least contains inked picture
elements at the same positions as the model dither cell (B) with the next-lower gray
20 scale value (G).
3. Method according to claim 1 or 2, characterized in that each tile (K) is
checked to see whether it contains dither cells of the type of the model dither cell with
the lowest gray scale value ($G=1$).
4. Method according to claim 3, characterized in that the check of the tiles
25 (K) ensues tile row by tile row, whereby the first row ($z1$) is investigated first per tile
(K); and in that, given a lack of coincidence, the appertaining tile (K) is investigated
no further.
5. Method according to claim 3 or 4, characterized in that the model dither
cell with the highest gray scale value ($G=3$) that is contained in all dither cells of a tile
30 (Ka) is determined for the tile (Ka) that contains dither cells of the type of the model

dither cell with the lowest gray scale value ($G=1$); and in that the gray scale value ($G=3$) of this model dither cell is assigned to this tile (Ka).

6. Method according to one of the preceding claims, characterized in that the tiles (K) have a uniform row length, preferably corresponding to the bit length of the register of a hardware module with which the method is implemented.

7. Method according to claim 6, characterized in that the row length amounts to 8, 16, 32, 64 or 128 bits or an additive combination thereof.

8. Method according to claim 7, characterized in that, for determining whether a tile contains dither cells at least with the lowest gray scale value (G) corresponding to a model dither cell, a comparison cell ($Vz1, Vz2, Vz3, Vz4$) is employed that contains only these model dither cells and whose length at least corresponds to the row length of a tile; and in that the comparison is implemented tile row by tile row.

9. Method according to claim 8, characterized in that the length of the comparison row ($Vz1, Vz2, Vz3, Vz4$) amounts to the smallest common multiple of row length of the tile and row length of the dither cell, which preferably has an 8x8 or 10x10 picture element matrix.

10. Method according to claim 7, 8 or 9, characterized in that a comparison row ($Vz1, Vz2, Vz3, Vz4$) with appertaining model dither cells is employed for each gray scale value (G).

11. Method according to one of the preceding claims, characterized in that neighboring tiles having a prescribed gray scale value corresponding to a model dither cell are combined to form a polygon; and in that the characteristic data of this polygon are transmitted, preferably compressed, for further processing of the image raster data.

12. Method according to claim 11, characterized in that the polygon is a square or a rectangle (Ra, Rb, Rc, Rd, Re).

13. Method according to claim 12, characterized in that the tiles combined to form a rectangle (Rb) have a common minimal gray scale value ($G=1$); and in that the characteristic data of this rectangle (Rb) are transmitted.

14. Method according to claim 12 or 13, characterized in that the rectangle (Rf) contains a sub-rectangle (Rd) whose tiles have a minimum gray scale value (G) that is higher than the gray scale value (G) of the tiles of the rectangle.

15. Method according to one of the preceding claims 12 through 14,
5 characterized in that a list (L) of rectangles is produced; and in that characteristic data of this list are transmitted, preferably in compressed form.

16. Method according to claim 15, characterized in that the list (L) is organized such that rectangles with descending plurality of tiles assume a descending rank in the list; and in that only those rectangles from this list whose plurality of tiles
10 exceeds a predetermined value are transmitted for further processing.

17. Method according to claim 14 or 15, characterized in that the plurality of rectangles of the list is limited to a predetermined value.

18. Method according to one of the claims 12 through 17, characterized in that dither cells of a row or of a sequence that adjoin a rectangle (Rc, Rd, Re) and
15 have the same minimum gray scale value as the dither cells of the rectangle (Rc, Rd, Re) are incorporated into the expanded rectangle (Rc, Rd, Re), whereby the boundaries of the rectangles (Rc, Rd, Re) are correspondingly expanded.

19. Method according to one of the preceding claims 12 through 18, characterized in that the position of the upper left corner, the height, the width and the
20 gray scale value (G) are determined for each rectangle with reference to a page, and these characteristic data are transmitted, preferably in compressed form.

20. Method according to one of the preceding claims, characterized in that the raster image data of the marked tiles or of the marked rectangles (Ra) are removed from the data stream by subtraction;
25 and in that the remaining data stream is compressed according to a standardized compression method and transmitted.

21. Method according to the preceding claim 20, characterized in that the FAX G4 compression method is employed as standardized compression method.

22. Method according to one of the preceding claims, characterized in that
30 the data of the marked tiles or of the rectangles (R1, R2) are transmitted according to the SPDS data format.

23. Method according to one of the claims 20 through 22, characterized in that the transmitted image raster data as re-compiled upon employment of an OR function.

24. Method according to one of the preceding claims, characterized in that
5 an RIP module, preferably a POSTSCRIPT converter module (PS) is employed for generating the data stream of image raster data from language elements of the graphics language.

25. Method according to one of the preceding claims, characterized in that
10 it is employed for the transmission of print raster data to printers, preferably to high-performance printers.

26. Method according to claim 25, characterized in that the high-performance printer has a printing output greater than equal to 400 pages DIN A4 per minute at 600 dpi.

27. System for compressing and transmitting image raster data,
15 comprising an RIP module (RIP) that generates a data stream of image raster data page-by-page from language elements of a graphics language, said data stream containing gray image areas in the form of dither cells whose gray scale values (G) are determined by model dither cells (A,B),
whereby the image raster data of each and every page (S) are divided into tiles (K) of
20 a two-dimensional grid network (GN), whereby each tile (K) comprises a plurality of image raster data,
characterized in that the appertaining model dither cell and the gray scale value (G) thereof are identified for each tile (K) that contains only dither cells and this tile (K) is marked;
25 and in that characteristic data of the marked tiles (K) are transmitted for further processing of the image raster data, whereby these characteristic data contain information about the position of the respective tile (K) and the respective gray scale value (G).

28. System according to claim 27, characterized in that the dither cells
30 contain rectangularly or quadratically arranged picture elements; and in that the model dither cell (A) with higher gray scale value (G) at least contains inked picture

elements at the same positions as the model dither cell (B) with the next-lower gray scale value (G).

29. System according to one of the preceding claims 27 or 28, characterized in that neighboring tiles with predetermined gray scale value
5 corresponding to a model dither cell are combined to form a polygon; and in that characteristic data of this polygon are transmitted, preferably compressed, for further processing of the image raster data.

30. System according to claim 11, characterized in that the polygon is a square or a rectangle (Ra, Rb, Rc, Rd, Re).

10 31. Method for compressing and transmitting image raster data, whereby a data stream of image raster data is generated page-by-page from language elements of a graphics language, said data stream containing gray picture elements in the form of dither cells whose gray scale values (G) are defined by model dither cells (A, B),
15 characterized in that at least one area (R1, R2) is determined that contains only dither cells, whereby the appertaining model dither cell and the gray scale value (G) thereof is identified and this area (R1, R2) is marked; and in that characteristic data of the marked area (R1, R2) are transmitted for further processing of the image raster data, whereby these characteristic data contain
20 information about the position of the respective tile (K) and the respective gray scale value (G).

32. Method according to claim 31, characterized in that the dither cells contain rectangularly or quadratically arranged picture elements; and in that the model dither cell (A) with higher gray scale value (G) at least contains inked picture
25 elements at the same positions as the model dither cell (B) with the next-lower gray scale value (G).

33. Method according to claim 32, characterized in that the dither cells of a rectangular region (Rb) have a common minimum gray scale value (G=1).

34. Method according to claim 33, characterized in that a list (L) of
30 rectangles is produced; and in that the characteristic data of this list are transmitted, preferably in compressed form.

35. Computer program product comprising a computer-readable medium with which commands are offered in encoded form, these, after the loading of the computer program, causing the computer to implement the steps according to one of the claims 1 through 26 or 31 through 34.

5 36. Computer program element comprising commands in encoded form that cause the computer to implement the steps according to one of the claims 1 through 26 or 31 through 34.

37. Computer program element according to claim 36, characterized in that it is present on a computer-readable medium.

10 38. Computer-readable medium that contains a computer program, whereby the computer program causes a computer to implement steps according to one of the claims 1 through 26 or 31 through 34.

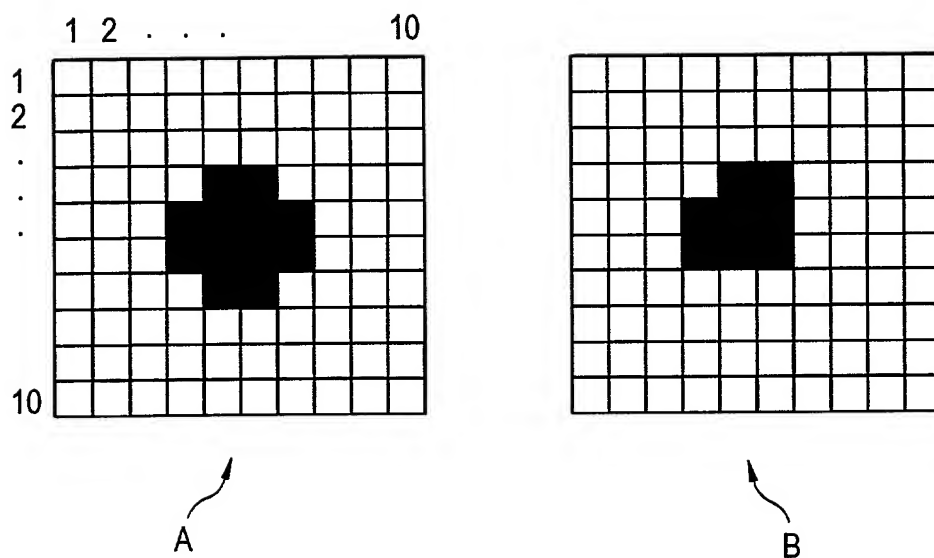


Fig.1

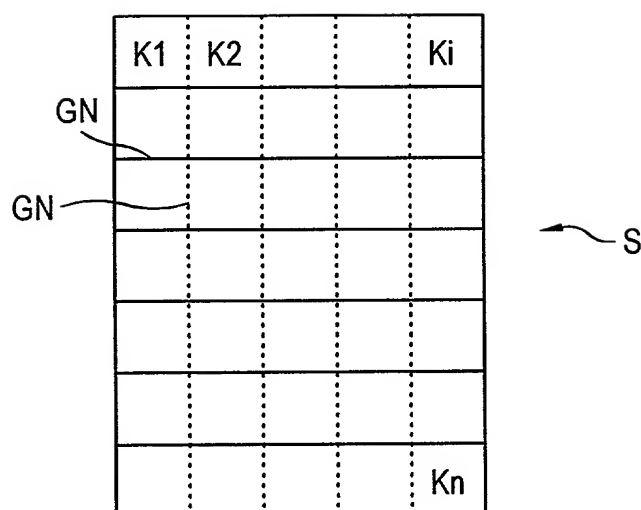


Fig.2

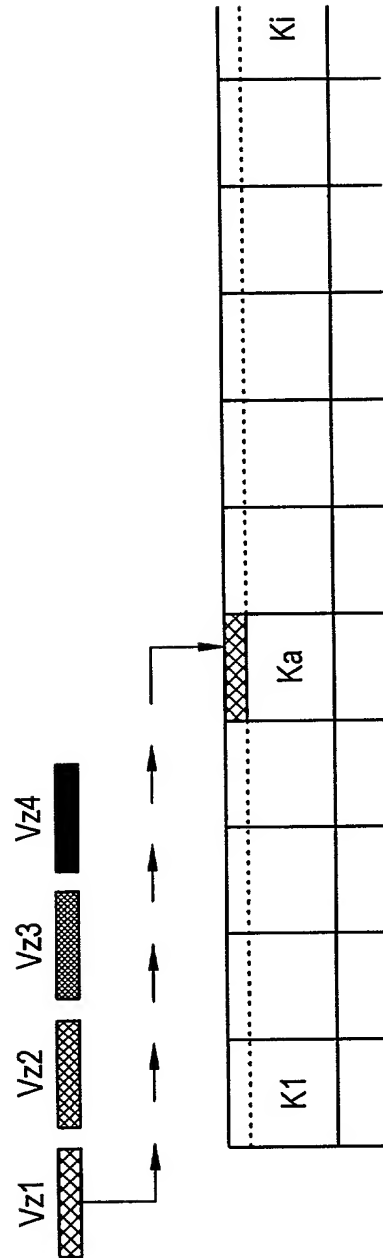


Fig.3

3/8

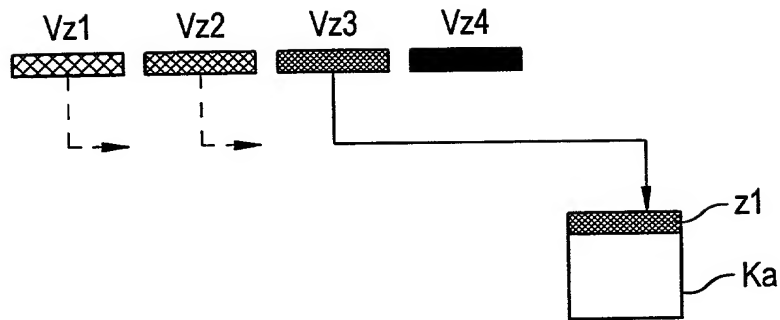


Fig.4

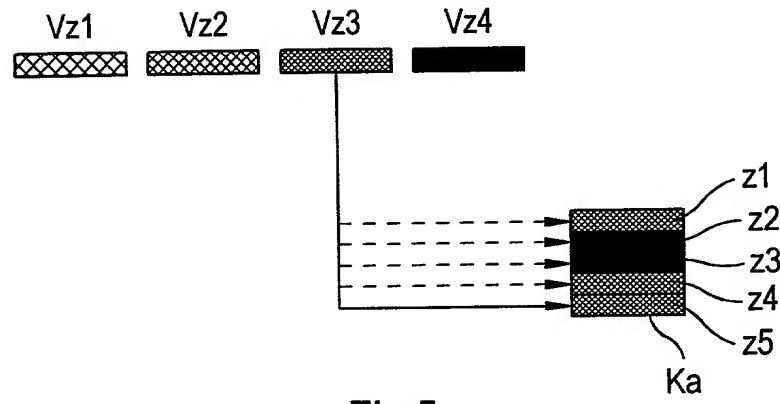


Fig.5

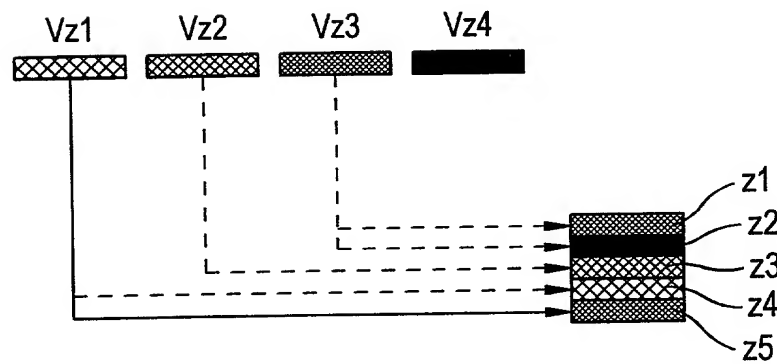


Fig.6

4/8

		K				Ra								Rb		
0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
0	0	0	3	3	3	3	3	3	3	3	3	1	1	2	0	0
0	0	0	3	3	3	3	3	3	3	0	0	0	1	2	0	0
0	0	0	3	3	3	3	3	3	3	0	0	1	1	1	0	0
0	0	0	3	3	0	0	0	0	0	0	0	0	0	0	0	0
0	0	0	3	0	0	0	0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Fig.7

S

						Ra										
0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0	3	3	1	1	2	0	0
0	0	0	0	0	0	0	0	0	0	0	0	0	1	2	0	0
0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	0	0
0	0	0	3	3	0	0	0	0	0	0	0	0	0	0	0	0
0	0	0	3	0	0	0	0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Fig.8

S

5/8

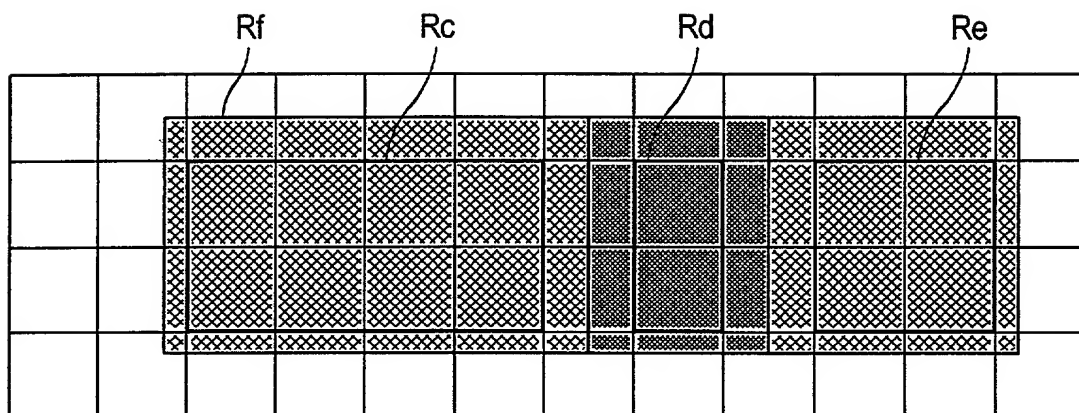


Fig.9

S

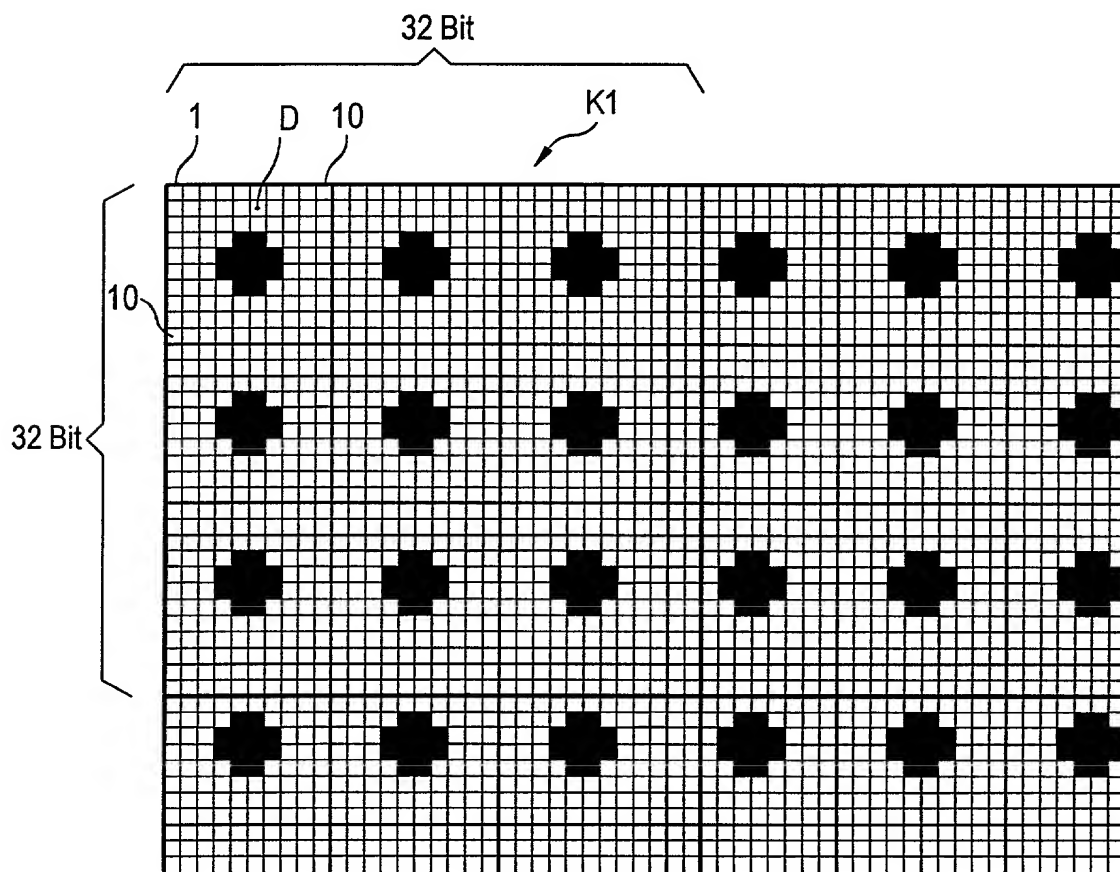


Fig.10

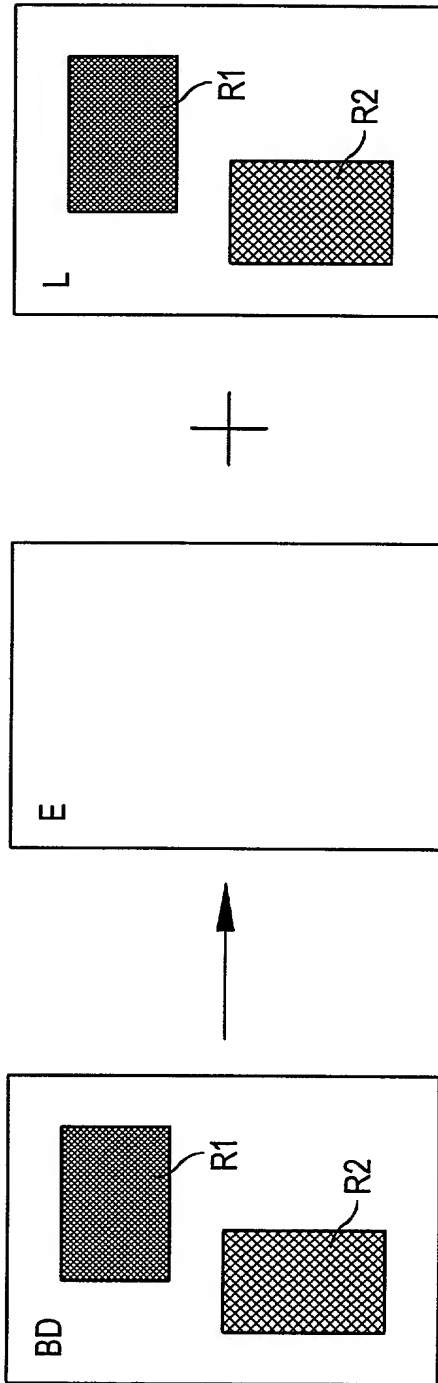


Fig.11

S

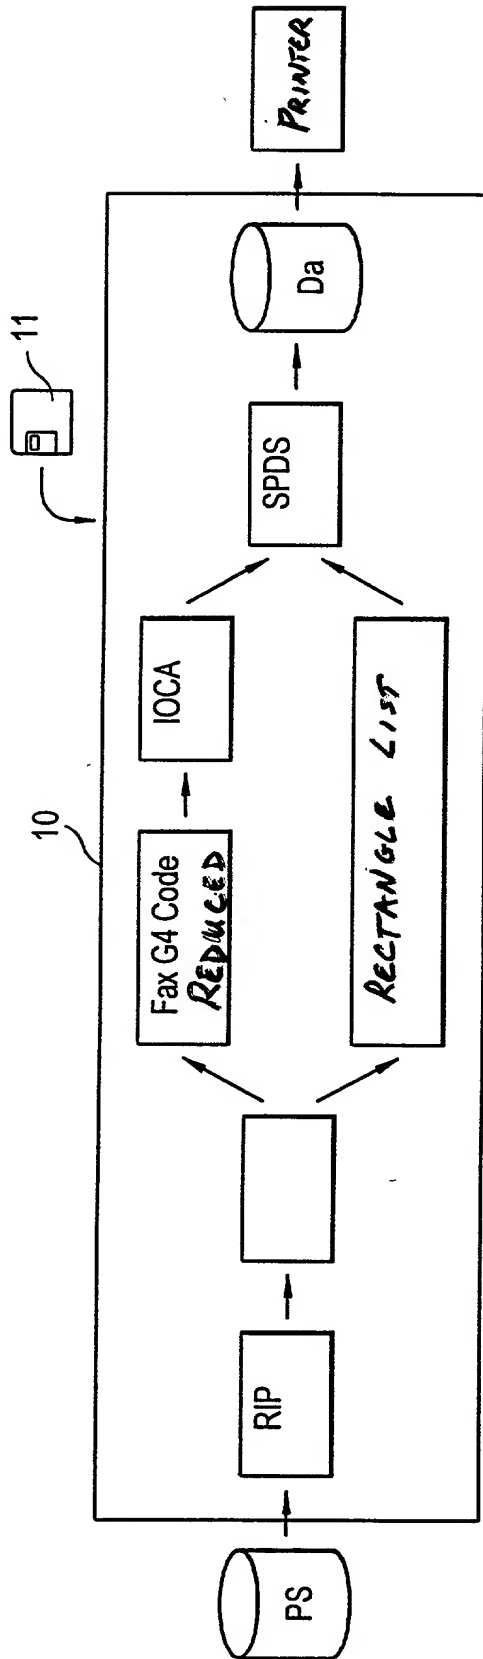


Fig.12

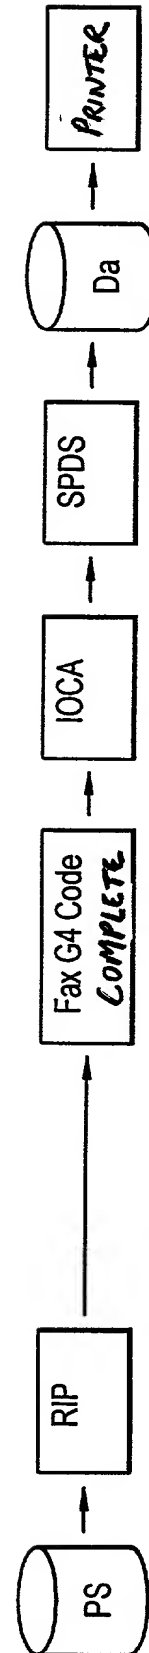


Fig.13

8/8

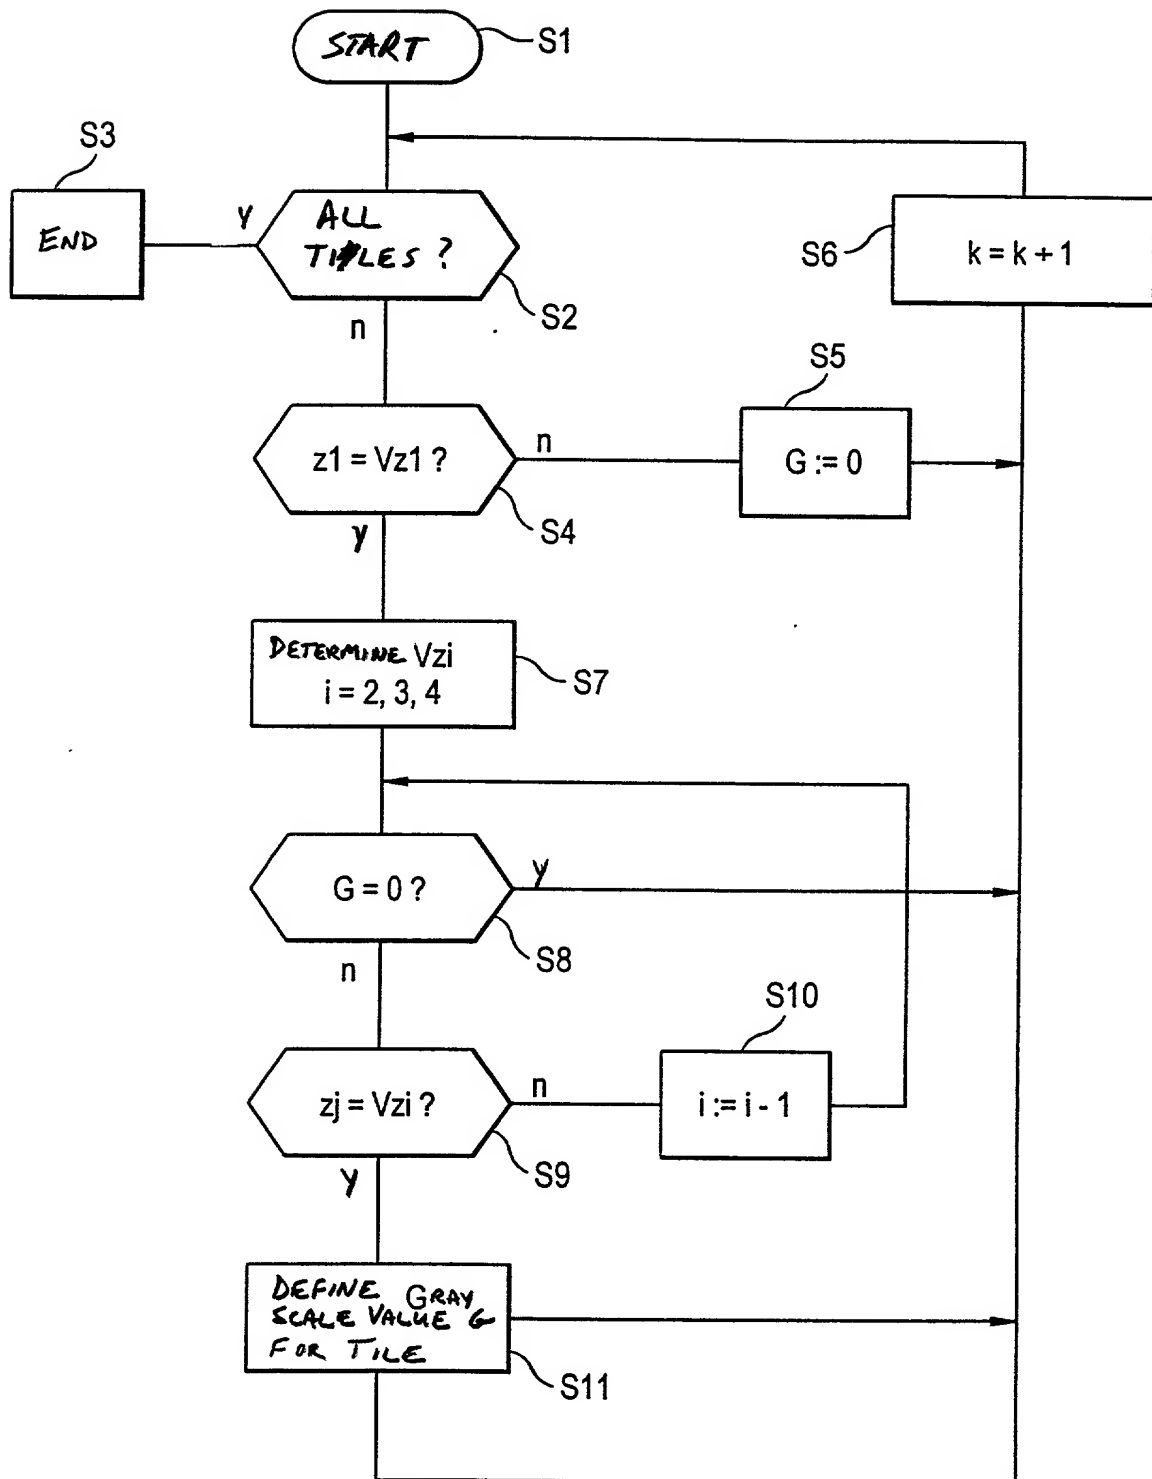


Fig.14

93 0402 1015

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION
ERKLÄRUNG FÜR PATENTANMELDUNGEN MIT VOLLMACHT
German Language Declaration

Als nachstehend benannter Erfinder erkläre ich hiermit an Eides Statt:

dass mein Wohnsitz, meine Postanschrift, und meine Staatsangehörigkeit den im Nachstehenden nach meinem Namen aufgeführten Angaben entsprechen,

dass ich, nach bestem Wissen der ursprüngliche, erste und alleinige Erfinder (falls nachstehend nur ein Name angegeben ist) oder ein ursprünglicher, erster und Miterfinder (falls nachstehend mehrere Namen aufgeführt sind) des Gegenstandes bin, für des dieser Antrag gestellt wird und für den ein Patent beantragt wird für die Erfindung mit dem Titel:

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

**METHOD, SYSTEM AND COMPUTER PROGRAM
FOR COMPRESSING AND TRANSMITTING IMAGE
RASTER DATA**

the specification of which

(check one)

☐ is attached hereto

☒ was filed on 28 April 2000
as United States application Number or PCT
international application Number PCT/EP00/03850

and was amended on _____
(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

(zutreffendes ankreuzen)

☐ hier beigelegt ist.

☒ am _____ als
PCT internationale Anmeldung

PCT Anmeldungsnummer _____
eingereicht wurde und am _____
abgeändert wurde (falls tatsächlich abgeändert).

Ich bestätige hiermit, dass ich den Inhalt der obigen Patentanmeldung einschliesslich der Ansprüche durchgesehen und verstanden habe, die eventuell durch einen Zusatzantrag wie oben erwähnt abgeändert wurde.

Ich erkenne meine Pflicht zur Offenbarung irgendwelcher Informationen, die für die Prüfung der vorliegenden Anmeldung in Einklang mit Absatz 37, Bundesgesetzbuch, Paragraph 1.56 von Wichtigkeit sind, an.

Ich beanspruche hiermit ausländische Prioritätsvorteile gemäss Abschnitt 35 der Zivilprozessordnung der Vereinigten Staaten, Paragraph 119 aller unten angegebenen Auslandsanmeldungen für ein Patent oder eine Erfindersurkunde, und habe auch alle Auslandsanmeldungen für ein Patent oder eine Erfindersurkunde nachstehend gekennzeichnet, die ein Anmeldedatum haben, das vor dem Anmeldedatum der Anmeldung liegt, für die Priorität beansprucht wird.

German Language Declaration

Prior foreign applications
Priorität beansprucht

199 19 624.9 Germany 29 April 1999
(Number) (Country) (Day Month Year Filed)
(Nummer) (Land) (Tag Monat Jahr eingereicht)

(Number) (Country) (Day Month Year Filed)
(Nummer) (Land) (Tag Monat Jahr eingereicht)

(Number) (Country) (Day Month Year Filed)
(Nummer) (Land) (Tag Monat Jahr eingereicht)

Priority Claimed

<input checked="" type="checkbox"/>	<input type="checkbox"/>
Yes	No
Ja	Nein
<input type="checkbox"/>	<input type="checkbox"/>
Yes	No
Ja	Nein
<input type="checkbox"/>	<input type="checkbox"/>
Yes	No
Ja	Nein

Ich beanspruche hiermit gemäss Absatz 35 der Zivilprozessordnung der Vereinigten Staaten, Paragraph 120, den Vorzug aller unten aufgeführten Anmeldungen und falls der Gegenstand aus jedem Anspruch dieser Anmeldung nicht in einer früheren amerikanischen Patentanmeldung laut dem ersten Paragraphen des Absatzes 35 der Zivilprozessordnung der Vereinigten Staaten, Paragraph 122 offenbart ist, erkenne ich gemäss Absatz 37, Bundesgesetzbuch, Paragraph 1.56 meine Pflicht zur Offenbarung von Informationen an, die zwischen dem Anmeldedatum der früheren Anmeldung und dem nationalen oder PCT internationalen Anmeldedatum dieser Anmeldung bekannt geworden sind.

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §122 I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application.

(Application Serial No.) (Filing Date)
(Anmeldeseriennummer) (Anmeldedatum)

(Status) (Status)
(patentiert, anhängig, (patented, pending,
aufgegeben) abandoned)

(Application Serial No.) (Filing Date)
(Anmeldeseriennummer) (Anmeldedatum)

(Status) (Status)
(patentiert, anhängig, (patented, pending,
aufgegeben) abandoned)

Ich erkläre hiermit, dass alle von mir in der vorliegenden Erklärung gemachten Angaben nach meinem besten Wissen und Gewissen der vollen Wahrheit entsprechen, und dass ich diese eidesstattliche Erklärung in Kenntnis dessen abgebe, dass wissentlich und vorsätzlich falsche Angaben gemäss Paragraph 1001, Absatz 18 der Zivilprozessordnung der Vereinigten Staaten von Amerika mit Geldstrafe belegt und/oder Gefängnis bestraft werden koennen, und dass derartig wissentlich und vorsätzlich falsche Angaben die Gültigkeit der vorliegenden Patentanmeldung oder eines darauf erteilten Patentes gefährden können.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

German Language Declaration

VERTRETUNGSVOLLMACHT: Als benannter Erfinder beauftrage ich hiermit den nachstehend benannten Patentanwalt (oder die nachstehend benannten Patentanwälte) und/oder Patent-Agenten mit der Verfolgung der vorliegenden Patentanmeldung sowie mit der Abwicklung aller damit verbundenen Geschäfte vor dem Patent- und Warenzeichenamt: (Name und Registrationsnummer anführen)


POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list name and registration number)

And I hereby appoint all Attorneys Identified by United States Patent & Trademark Office Customer Number 26574, who are all members of the firm of Schiff Hardin and Waite.

Telephone 312/-258-5500 Patent Department

my attorneys with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith and direct that all correspondence be forwarded to:

Schiff, Hardin & Waite
Atten: Patent Department
6600 Sears Tower, Chicago, Illinois 60606 -6473
Customer Number 26574

Voller Name des einzigen oder ursprünglichen Erfinders: 1 - 00		Full name of sole or first inventor: <u>HELMUT WEINER</u>	
Unterschrift des Erfinders	Datum	Inventor's signature 	Date 31. 8. 2001
Wohnsitz		Residence 81371 Muenchen DEX Germany	
Staatsangehörigkeit		Citizenship Germany	
Postanschrift		Post Office Address Schaeftlarnstrasse 88	
		85586 Poing Germany	